

RF Cable, SMA-F ~ U.FL

ERF5030

Description

The ERF5030 is a RF-Cable suitable for RF applications. The cable has a SMA female connector, and an U.FL connector. It can be used for RF cable assemblies, and as an accessory for antenna's.



Typical applications

- RF Cable assembly
- Antenna accessory

Features

Mechanical Properties

Connector Type:

SMA Female & U.FL

Cable Length:

250 mm ± 3

Cable type:

Coaxial

Operating Temperature Range:

-20°C~+75°C

Storage Temperature Range:

-40°C~+80°C


Dimensions

*unit: mm

Part	Description	Diameter/Material	Finish	QTY
1	Cable	1,13 mm	Black	1
2	SMA ST.Jack			1
3	IPEX U.FL			1
4	Washer	Brass	Gold plating	1
5	Nut	Brass	Gold plating	1
6	Heat shrink tube		Black	1

RF Cable, SMA-F ~ U.FL

ERF5030

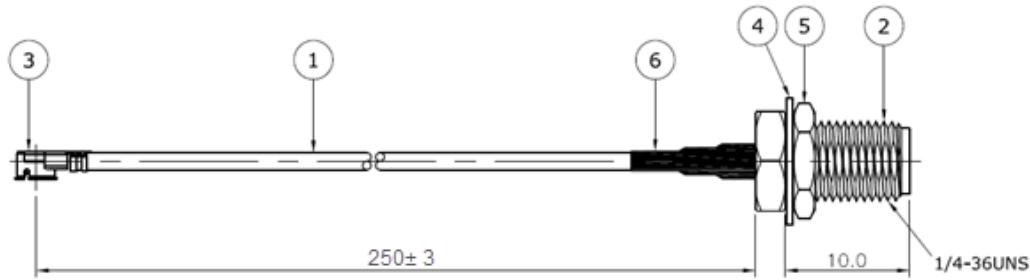

Connector



SMA Male



SMA Female



RP-SMA Male



RP-SMA Female

The ERF5030 uses a SMA Female and an U.FL connector.

Ordering information

Ordering can be done via www.summit-electronics.com or via info@summit-electronics.com. Please contact us for more information. Customisation of the product is available on request.

Technical support

For all product questions please contact us via info@summit-electronics.com

Document revision

Rev	Date	changes
V01.00	17-07-2023	First issue of document, EK