

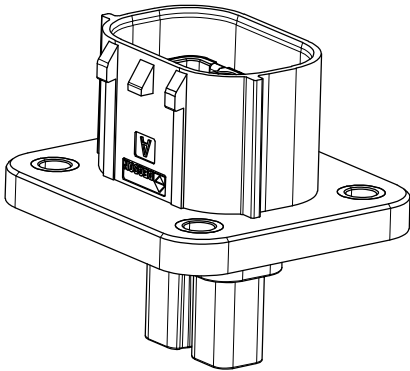
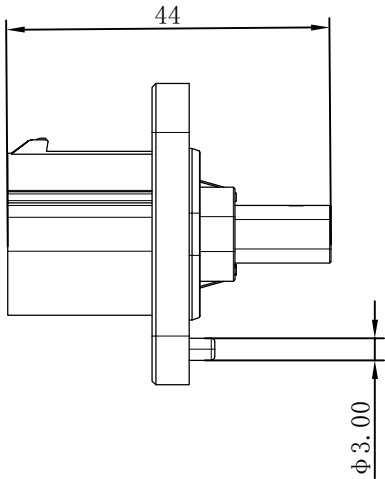
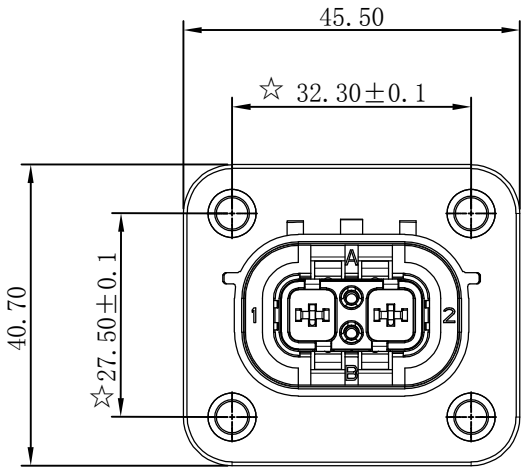
Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除非经书面明确授权, 否则禁止转让、复制、利用、交流和文件附注者。 侵犯者将承担法律责任。 版权所有所有权利。

客户图

Drawings for customers

未注公差参照/General tolerances according to(mm): ISO2768-1 C							
>0.5~3	> 3~6	> 6~30	> 30~120	> 120~400	>400~1000	>1000~2000	>2000~4000
±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3	±4

名称 Name	2芯280-插座总成CodeA 2PIN280-Header Assy-CodeA	2芯280-插座总成CodeB 2PIN280-Header Assy-CodeB	2芯280-插座总成CodeC 2PIN280-Header Assy-CodeC	2芯280-插座总成CodeD 2PIN280-Header Assy-CodeD	2芯280-插座总成CodeE 2PIN280-Header Assy-CodeE
键位 Code	A	B	C	D	E
键位示意图 Differernt code view					



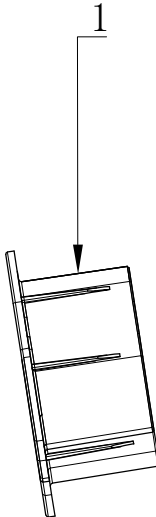
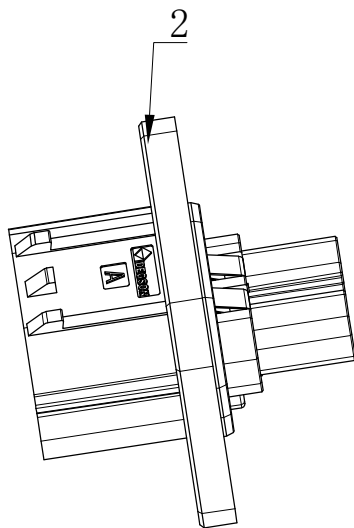

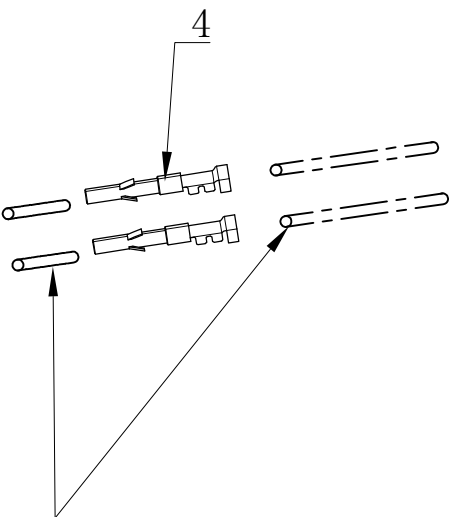
产品图
product view

- 技术要求 Technical specification:
- 1、性能参数 Performance parameter:
- a、工作温度 Temperature Range: -40℃~125℃
 - b、额定工作电压 Working Voltage: 1000V DC
 - c、额定工作电流 Current Capability:
16A Max@2.5mm² 24A Max@4mm²
 - d、工作海拔 Altitude: 5000M
 - e、绝缘电阻 Insulation resistance: >200MΩ 1000V DC
 - f、耐电压 Withstand voltage: <5mA 1min 3000V AC
 - g、防护等级 Class of protection: IP68、IP6K9K、IPXXB
- 2、法律法规 Laws and regulations
- ★a、产品符合阻燃要求;
a、The product meets the flame retardant requirements
 - ★b、环保要求 Environmental protection requirement: RoHS 2.0

	材料/MATERIAL: /		表面效果/SURFACE: /	
	料号/PN: 26040000006		样品状态/MAT STATUS:/	
批准/APPD	梁东	2024-06-15	名称/NAME: 2芯280-插座总成 2PIN280-Header Assy	
审核/CHKD	李京乐	2024-06-15		
制图/DRFT	陈自发	2024-06-15	版本/REV 00	客户图纸/Customer drawing
		A3	图纸状态/DRAWING STATUS /	比例/SCALE 1:1
				页数/SHEET 1/2

00	/	图纸首发/First edition drawing	陈自发	2024-06-15
图纸版本	ECN	变更描述	设计人	设计日期
REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除非经书面明确授权，否则禁止转让、复制、利用、交流本文件所行悉。侵犯者将承担法律责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

客户图 Drawings for customers											
DBYR-02E28-C04 26040000231	4mm ² 、CodeE、 Shielded connector	1	-	-	-	-	1	2	2	E	
DBYR-02D28-C04 26040000227	4mm ² 、CodeD、 Shielded connector	1	-	-	-	1	-	2	2	D	
DBYR-02C28-C04 26040000223	4mm ² 、CodeC、 Shielded connector	1	-	-	1	-	-	2	2	C	
DBYR-02B28-C04 26040000219	4m ² 、CodeB、 Shielded connector	1	-	1	-	-	-	2	2	B	
DBYR-02A28-C04 26040000004	4mm ² 、CodeA、 Shielded connector	1	1	-	-	-	-	2	2	A	
DBYR-02E28-C03 26040000229	2.5mm ² 、CodeE、 Shielded connector	1	-	-	-	-	1	2	2	E	
DBYR-02D28-C03 26040000225	2.5mm ² 、CodeD、 Shielded connector	1	-	-	-	1	-	2	2	D	
DBYR-02C28-C03 26040000220	2.5mm ² 、CodeC、 Shielded connector	1	-	-	1	-	-	2	2	C	
DBYR-02B28-C03 26040000217	2.5m ² 、CodeB、 Shielded connector	1	-	1	-	-	-	2	2	B	
DBYR-02A28-C03 26040000006	2.5mm ² 、CodeA、 Shielded connector	1	1	-	-	-	-	2	2	A	
型号/料号 Type /PN	物料描述 Product description	26040000328	26040000111	26040000233	26040000237	26040000241	26040000245	26040000325	26040000326	键位 Code	备注 Note
		插座防尘盖 Header dust cover	CodeA	CodeB	CodeC	CodeD	CodeE	公端子 Male terminal	高压互锁端子 HVIL Terminal		
	子零件BOM Component BOM		插座壳体总成 Header housing Assy								
		No. 1	No. 2					No. 3	No. 4		
1  2  3  4  功率线缆、信号线缆（根据顾客需求进行定制） Power cable Signal cable (customized according to customer needs) 批准/APPD 梁东 2024-06-15 审核/CHKD 李京乐 2024-06-15 制图/DRFT 陈自发 2024-06-15 00 / 图纸首发/First edition drawing 陈自发 2024-06-15 图纸版本 ECN 变更描述 设计人 设计日期 REV ECN DESCRIPTION DRFT DATE  DEGSON 材料/MATERIAL: / 表面效果/SURFACE: / 料号/PN: 26040000006 样品状态/MAT STATUS:/ 名称/NAME: 2芯280-插座总成 2PIN280-Header Assy 版本/REV 00 类型/TYPE 客户图纸/Customer drawing 图纸状态/DRAWING STATUS / 比例/SCALE 1:1 页数/SHEET 2/2											