
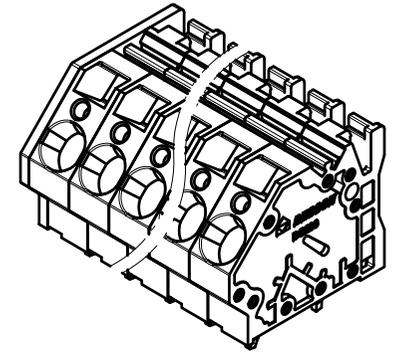

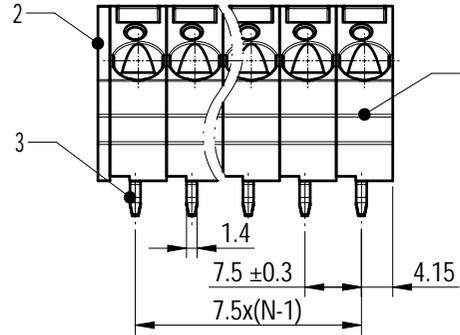
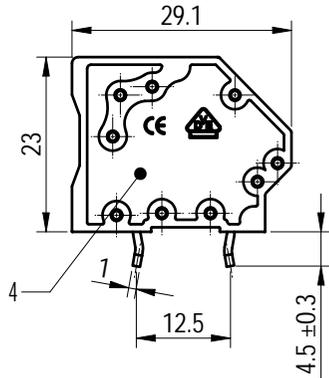



PCB LAYOUT

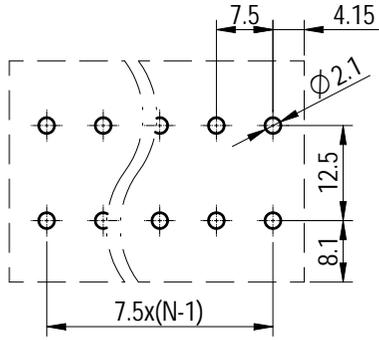

未注公差/General tolerances (mm)													0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/30	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overtoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	500/41	630/41	1000/41
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	6	6
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	24~10/0.2~6		
间距/Pitch(mm)/线数范围/Poles	7.5/N=01~16P		
剥线长度/Stripping length(mm)	11~12		
使用温度范围/Operating temperature(°C)	-40~+105		

Note:
The A&Z(H) in the name means :A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
4	Spring	Stainless steel	/
3	Pin header	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

		MATERIAL: /	SURFACE/COLOR: /	
		MAT NO./REV: - / 00	MAT STATUS: 批量	
APPD: 兰春华	2022.08.25	NAME		
CHKD: 陈招	2022.08.25	DG263-7.5-XXP-1Y-00A&Z(H)		
DRFT: 柳学龙	2022.08.25	DRAWING NO.	TYPE	DRAWING STATUS
		200025197	CUSTOMER DRAWING	已发布
		SCALE	SHEET	
		1:1	1/1	

REV	ECN	DESCRIPTION	DRFT	DATE
00			柳学龙	2022.08.25

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in advance. All rights reserved for patent, utility model or design registrations. 除专利申明授权外, 否则禁止非法、复制、引用、交流本文件的程序、数据、原理、流程图等, 未经事先书面许可, 任何复制或传播行为均属于侵权。