
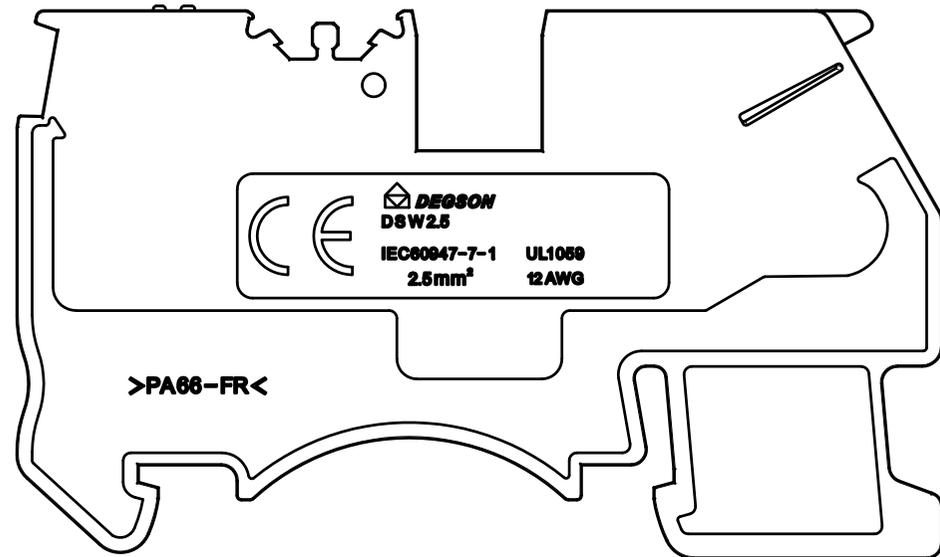
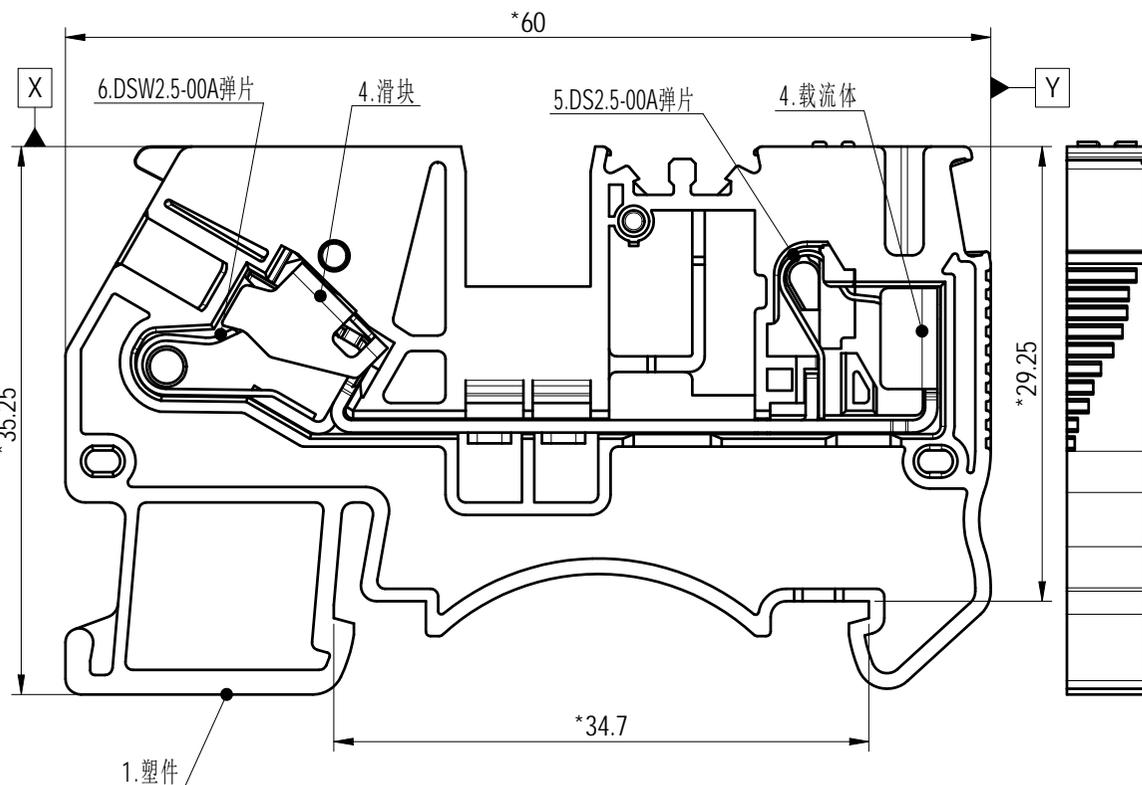
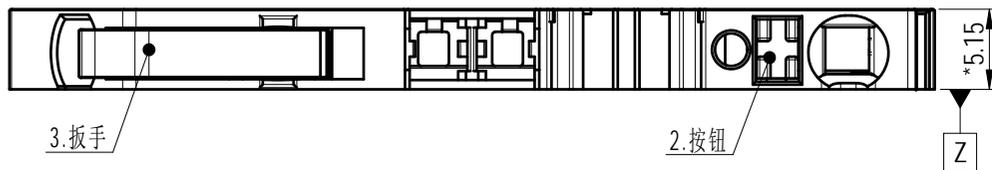


未注公差/General tolerances (mm)											0.05/10 ±1°		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315		>315 ~ 400	>400 ~ 500
±0.08	±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20

UL 额定电压电流/Rated Voltage/Current	600V/20A(B)
UL 工频耐压/R.M.S withstand voltage	AC1600V/1Min
IEC 额定电压电流/Rated Voltage/Current	800V/24A(III/2)
额定脉冲电压/Rate Impulse Voltage(KV)	6
线径范围/Wire range(AWG/mm²)	26~12/0.2~2.5&4(sol)
线数范围/Poles	01P
重点管控符号/Key controlled symbol	*
包装规范/Packaging specification	SOP-Y-2877
使用温度范围/Operating temperature(°C)	-40~+105
剥线长度/Stripping length(mm)	10~12

未标尺寸请参考3D文件



		MATERIAL:	SURFACE/COLOR:		
		MAT NO./REV: 11040001107-1 / 00.01	MAT STATUS: 小批量		
APPD: 李根劳	2023.07.28	NAME			
CHKD: 马恩开	2023.07.28	DSW2.5-01P-1Y-00Z(H)			
DRFT: 郑启国	2023.07.28				
DRAWING NO. 200207445		TYPE	DRAWING STATUS	SCALE	SHEET
		PRODUCT DRAWING	work	2:1	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00	/	设计下发	郑启国	2023.07.28

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除特别声明外，任何未经许可、复制、引用、交流本文件中的信息，侵犯者将承担赔偿责任。本公司保留对专利和外观设计的所有权利。