
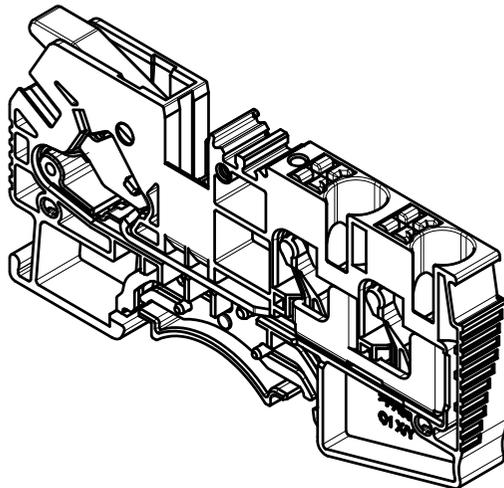


未注公差/General tolerances (mm)												0.1/10		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400		>400 ~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

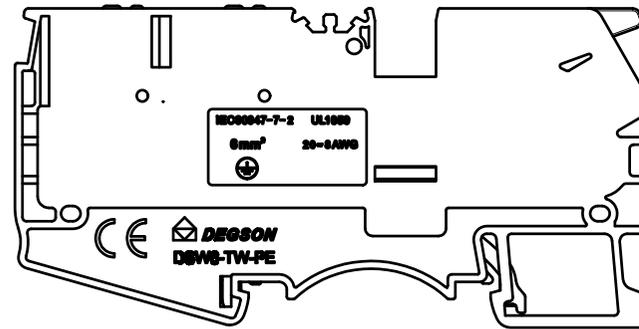

ITEM	NAME OF PART	MATERIAL	NOTES
8	PE	Copper alloy	Sn Plated
7	Slider	Stainless steel	/
6	Spring 2	Stainless steel	/
5	Spring 1	Stainless steel	/
4	Current carrier	Copper	Sn Plated
3	Lever	PA66+GF	UL94V-0
2	button	PA66+GF	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	20~8/0.5~6&10(sol)		
间距/Pitch(mm)/线数范围/Poles	8.2/01P		
剥线长度/Stripping length(mm)	10~12		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

<b>DEGSON</b>		MATERIAL:	SURFACE/COLOR:	
MAT NO./REV: 11040001157-1 / 00		MAT STATUS: work		
APPD: 李根芳	2023.09.27	NAME		
CHKD: 马恩升	2023.09.27	DSW6-TW-PE-01P-1C-00Z (H)		
DRFT: 王林祥	2023.09.27	DRAWING NO.	TYPE	DRAWING STATUS
		200254323	CUSTOMER DRAWING	work
		SCALE	SHEET	
		1:1	1/1	

REV	ECN	DESCRIPTION	DRFT	DATE
00	/	/	王林祥	2023.09.27

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除非得到明确授权，否则禁止转让、复制或、利用、分发本文件中的内容。未经许可擅自复制或分发，公司将保留追究相关法律责任的权利。