

未注公差/General tolerances(mm)






0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

使用温度范围/Operating temperature(°C)

-40~+105

符合RoHS环保要求/Conform to RoHS

Yes

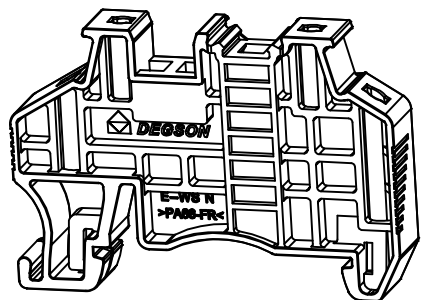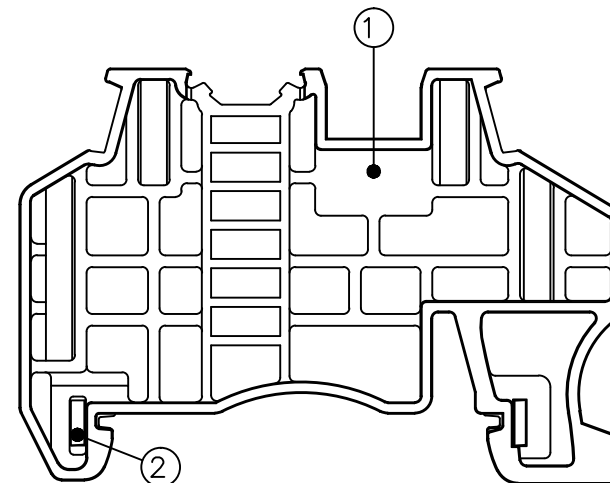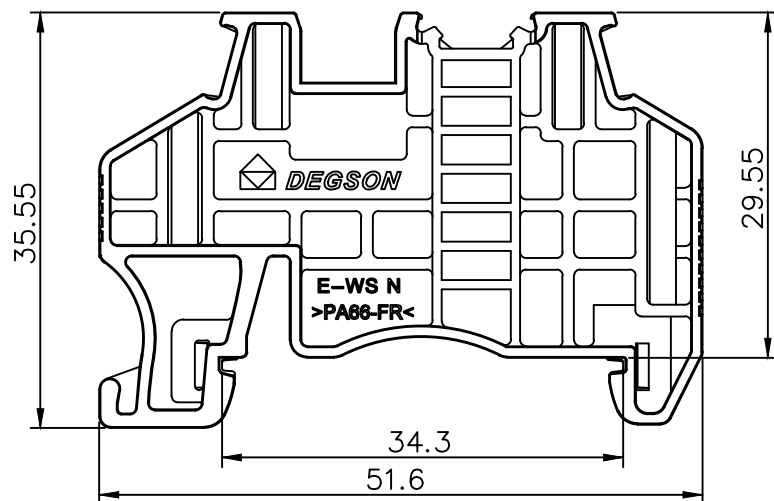

2	Stator	Stainless steel	/
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL: /		SURFACE/COLOR: /	
		MAT NO./REV: /		MAT STATUS: /	
APPD: Li GL	2022.06.15	NAME E-WS N-01P-1Y-00A(H)			
CHKD: Ma EK	2022.06.15				
DRFT: Liu Y	2022.06.15	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
 A4		/	CUSTOMER DRAWING	/	1.5:1
					SHEET 1/1

00	/	/	Liu Y	2022.06.15
REV	ECN	DESCRIPTION	DRFT	DATE