
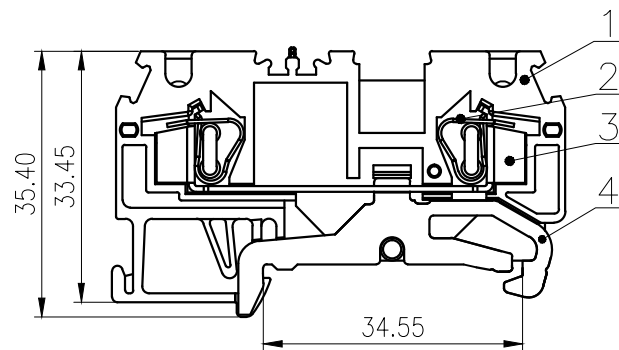
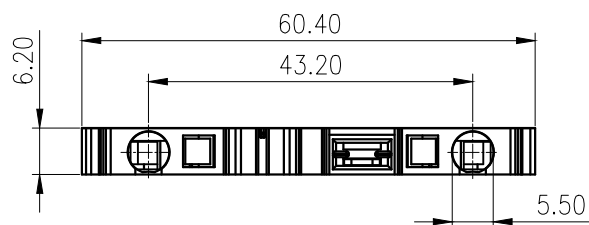


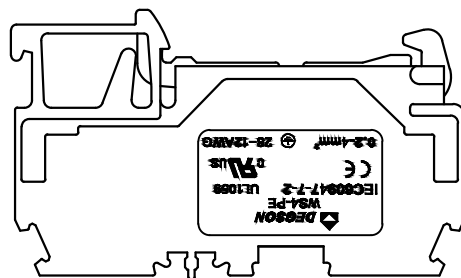

NOTES1:

UL Standard

1.Wire range : 28~12AWG

IEC Standard

1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV
Rate voltage(V)	/
Rate current(A)	/

2.Wire range : 0.2~4mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2..Stripping length : 10.0mm


3.Operating temperature: -40°C~+105°C

4.Undimensioned tolerances:

Pitch Range In mm			Nominal Dimension Range In mm					-	∩	∇
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.14/10		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°		

5.RoHS Compliance

4	Grounded part	Copper alloy	Sn plated
3	Current carrier	Copper	Sn plated
2	Spring	Stainless steel	/
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

MATERIAL: /		SURFACE: /				
MAT NO.: /	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD					
STATUS: /						
APPD: Li GL 2020.10.16	NAME: WS4-PE-01P-1C-100A(H)					
CHKD: Mao J 2020.10.16	DRAWING NO.: WS4-PE-C02					
DRFT: LiuZH 2020.10.16						
	SIZE: A4		TYPE: CUSTOMER DRAWING	SCALE: 1:1	SHEET	1/1
				REV	T2	