


Extruded heat sinks: the most popular mean to cool semiconductors in natural convection. Possibility to optimize shapes under custom specifications.
Hereunder a selection of the most common sections.


Part Number	Width (mm)	Height (mm)	Linear weight (kg/m)
RMRES0012	168	21	3.85

Rth,n *) (°C/W)	Rth,f **) (°C/W)
0.55	0.23

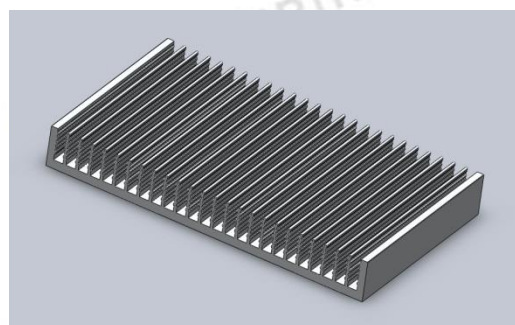

Part Number	Width (mm)	Height (mm)	Linear weight (kg/m)
RMRES0016	200	40	9.89

Rth,n *) (°C/W)	Rth,f **) (°C/W)
0.48	0.17

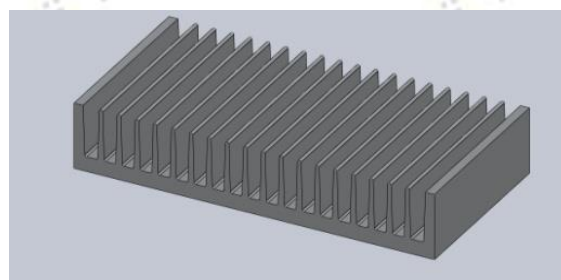

Part Number	Width (mm)	Height (mm)	Linear weight (kg/m)
RMRES0017	300	40	12.74

Rth,n *) (°C/W)	Rth,f **) (°C/W)
0.33	0.13

