

1.MATERIAL:

b. CONTACT: SUS304


(SURFACE PLATING: Ni100U"~120U"")

SEE ORDERING INFORMATION

2.ELECTRIC:

d.DIELECTRIC VOLTAGE: 500V AC ONE MINUTE

b. OPERATING TEMPERATURE: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

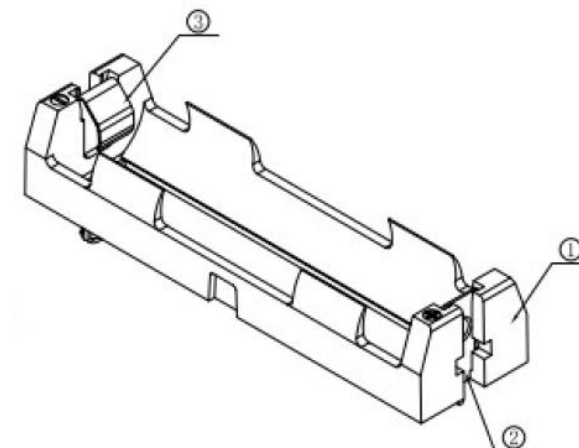

PCB Layout Diagram
TOP View

3	TERMINAL-	1	SUS304 T=0.35MM	Ni(100-120u")-Plating
2	TERMINAL+	1	SUS304 T=0.35MM	Ni(100-120u")-Plating
1	HOUSING	1	PA46 UL94 V-0	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		Summit Electronics bv			
DECIMALS:	ANGLES:	DSND	Lieqinghuang	DATE	2023-06-12
X : ±0.50	X : ±3°	CHKD	ZhouRuicai	DATE	2023-06-12
X.X : ±0.30	X.X : ±1°	APVD	XueShunyong	DATE	2023-06-12
X.XX : ±0.25					
X.XXX : ±0.1					
WEIGHT:		SCALE:	SIZE: A4	VIEW: 	
SHEET 1 OF 1		UNIT: mm	REV.: A/O	OBJECT: MY	
		TITLE: Batteryholder 18650T-1 PART NO.: SBHO-18650-T1 DRAW NO.:WD-CP-0355			