


ETB2100-5.08-Poles, Terminal Plug, 5.08mm pitch

Features

Mechanical Properties

Parameter:	Description
Connector Type:	Terminal Plug
Dimensions:	$((5.08 \times \text{number of positions}) + 0.62) \times 15.1 \times 23.7 \pm 0.3$
Operating Temperature Range:	-40°C~+105°C
Pitch:	5.08 mm
Number of contacts:	02 - XX
Wire Range:	26 ~ 12 AWG / 0.5 ~ 2.5mm ²
Stripping length:	9 ~ 10 mm
Contact Material:	Copper Alloy, Ni plated
Spring:	Stainless Steel
Housing:	PA66 UL 94V-0

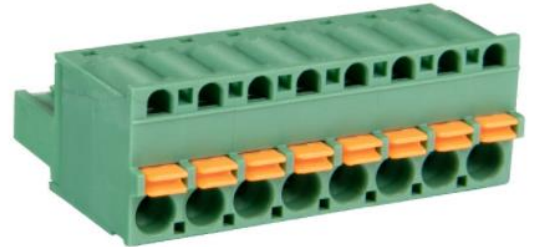

Typical applications

- Wire to Board
- Board to Wire

Electrical Properties

Parameter:	Description	
Standard:	UL	IEC
Rated Voltage:	300V	320V
Rated Current:	15A	20A
Withstanding Voltage:	AC 1600V / 1Min.	


Description

The ETB2100-5.08-Poles is a Terminal Plug with 5.08 mm pitch. The connector uses spring contacts for easy cable connection. The number of contacts can be selected in the P/N.

ETB2100-5.08-Poles, Terminal Plug, 5.08mm pitch

Dimensions

*unit: mm

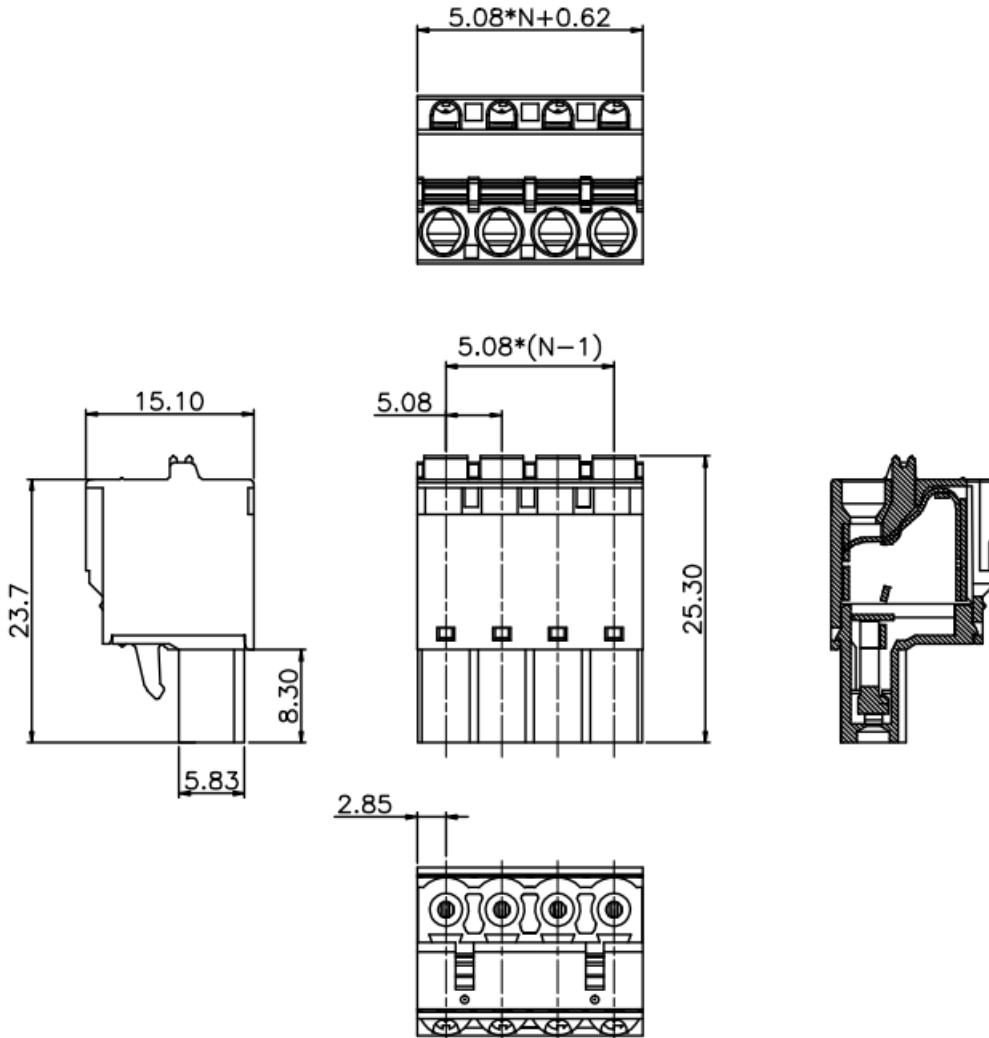

Ordering information

Ordering can be done via www.summit-electronics.com or via info@summit-electronics.com. Please contact us for more information. Customisation of the product is available on request.

Technical support

For all product questions please contact us via info@summit-electronics.com