

SWTB-C4200VD-Poles, Vertical Header, 4.20mm pitch

Features

Mechanical Properties

Parameter:	Description
Connector Type:	DIP, dual row
Orientation:	Vertical
Dimensions:	See table
Operating Temperature Range:	-40°C~+105°C
Pitch:	4.20 mm
Poles:	2-24 Poles
Insulator body:	Nylon 66, UL94V-2
Contact:	Brass, Tin plated over Nickel



Typical applications

- Wire to Board
- Board to Wire

Electrical Properties

Parameter:	Description
Rated Voltage:	600V AC / DC
Rated Current:	9A AC / DC
Contact Resistance:	10mΩ Max.
Insulation Resistance:	1000MΩ Min.
Withstanding Voltage	1500V AC / 1 Min.

Description




The SWTB-C4200VD-Poles is a Dip style connector with 4.20 mm pitch.

The connector is available up to 24 poles in both Horizontal and Vertical orientation.

SWTB-C4200VD-Poles, Vertical Header, 4.20mm pitch

Dimensions


*unit: mm

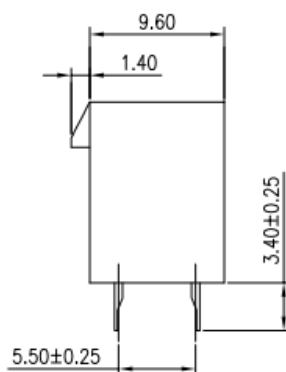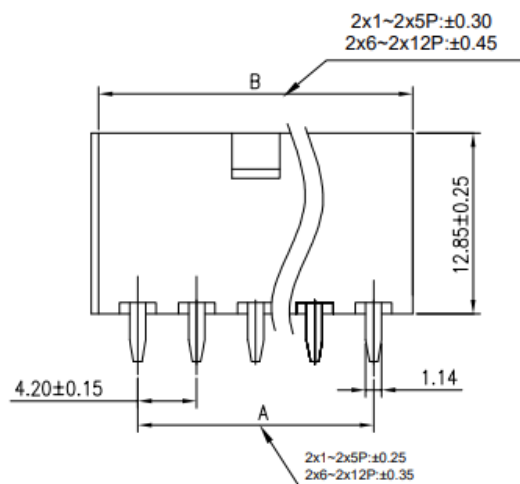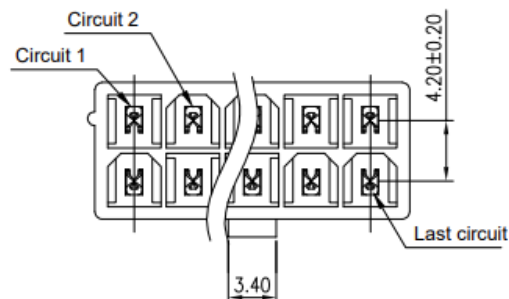

Number of Poles:	Dimensions	
	A	B
2*1P		5,60
2*2P	4,20	9,80
2*3P	8,40	14,00
2*4P	12,60	18,20
2*5P	16,80	22,40
2*6P	21,00	26,60
2*7P	25,20	30,80
2*8P	29,40	35,00
2*9P	33,60	39,20
2*10P	37,80	43,40
2*11P	42,00	47,60
2*12P	46,20	51,80

PCB Footprint

*unit: mm

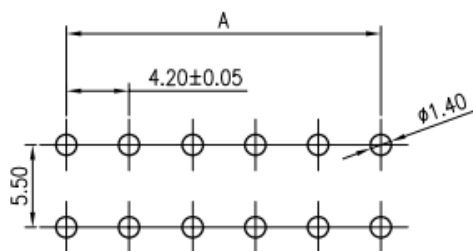

Ordering information

Ordering can be done via www.summit-electronics.com or via info@summit-electronics.com. Please contact us for more information. Customisation of the product is available on request.

Technical support

For all product questions please contact us via info@summit-electronics.com