

ERF4064, UMTS antenna, U.FL connector

**Features**

Electrical Properties Parameter:	Description
Frequency Band:	824~960 MHz / 1400 MHz / 1920~2170 MHz
Nominal Impedance:	50 Ω
Polarization:	Vertical
V.S.W.R:	< 2.0
Gain: (without cable)	2.5 dBi



**Mechanical Properties**

Parameter:	Description
Antenna Type:	External Antenna
Connector Type:	U.FL
Antenna Length:	49.3 ± 0.3 mm
Cable type:	RG178
Cable Length:	~ 100 mm ± 1 mm
Antenna Color:	Black
Operating Temperature Range:	-40°C~+85°C
Storage Temperature Range:	-40°C~+85°C

**Typical applications**

- GSM
- GPRS
- M2M
- 2G/3G
- UMTS

**Description**


The ERF4064 antenna is an internal UMTS antenna with a U.FL connector. The antenna can also be used in the frequency band of 1400 MHz.

The antenna can be used for applications such as, GSM , M2M and 2G/3G.


ERF4064, UMTS antenna, U.FL connector

Antenna Properties

Return Loss

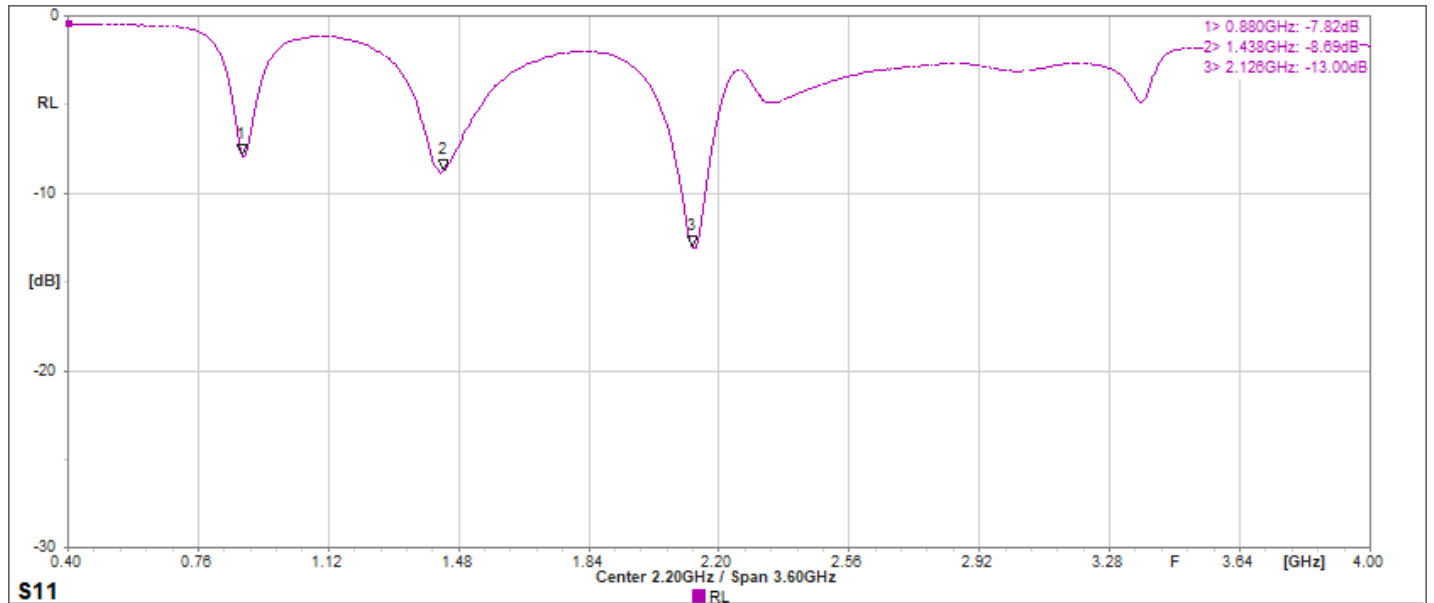


Forward Loss

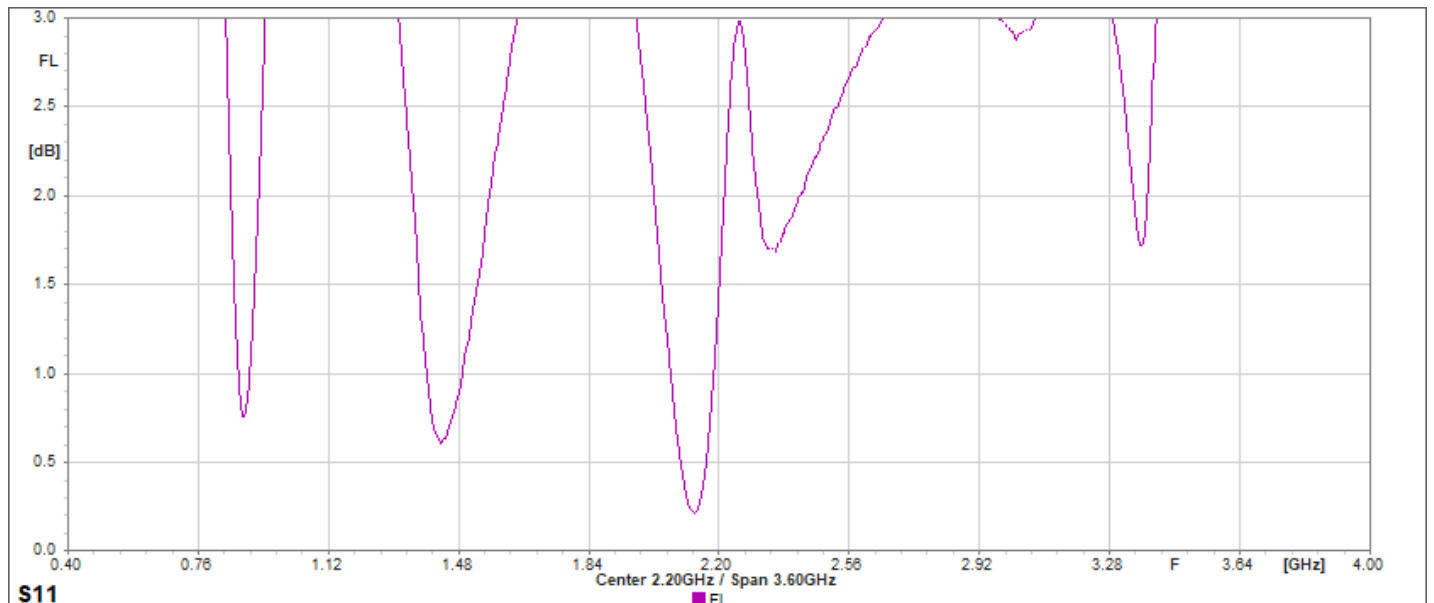


ERF4064, UMTS antenna, U.FL connector

Impedance

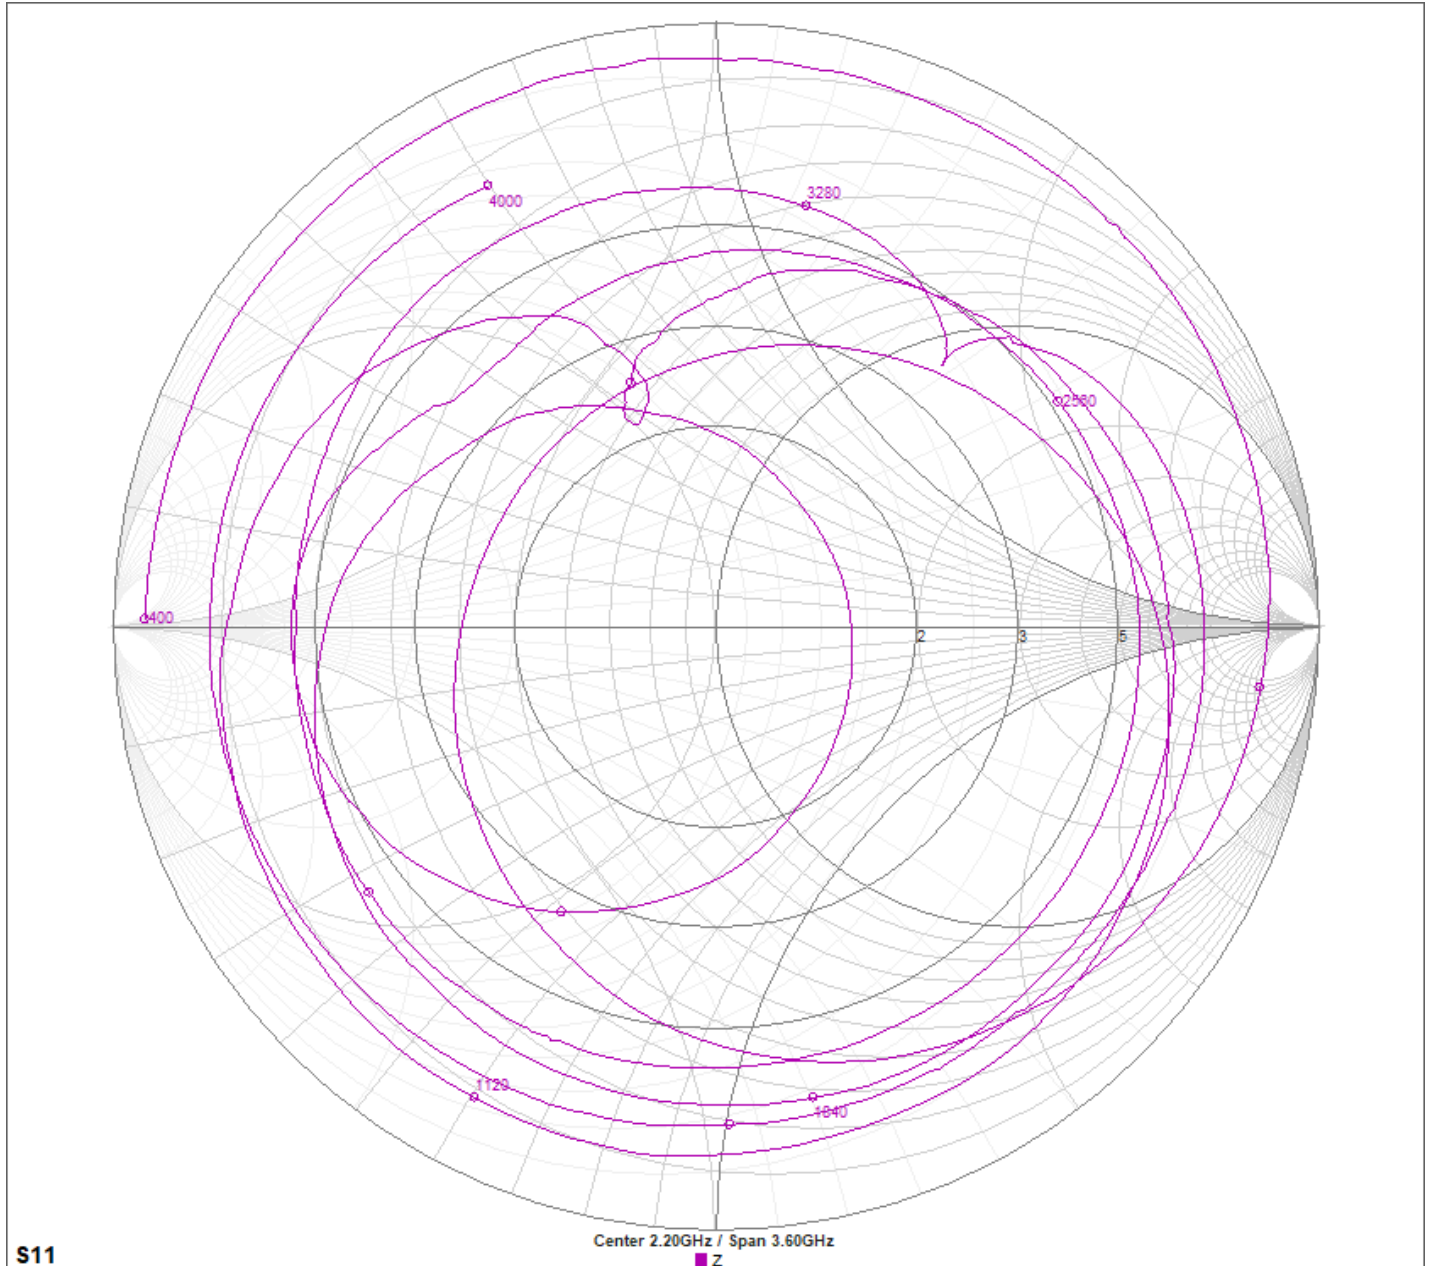

ERF4064, UMTS antenna, U.FL connector

Dimensions

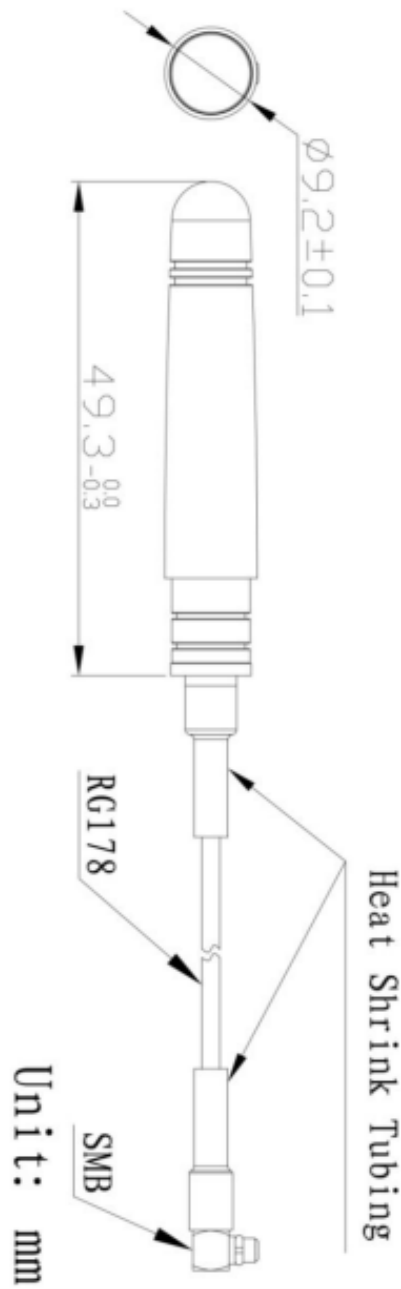



## ERF4064, UMTS antenna, U.FL connector

---

### Connector

The ERF4064 uses a U.FL connector.

### Ordering information

Ordering can be done via [www.summit-electronics.com](http://www.summit-electronics.com) or via [info@summit-electronics.com](mailto:info@summit-electronics.com). Please contact us for more information. Customisation of the product is available on request.

### Technical support

For all product questions please contact us via [info@summit-electronics.com](mailto:info@summit-electronics.com)