

ERF4066 , 433MHz antenna, SMA Male connector

Features

Electrical Properties

Parameter:	Description
Frequency Band:	433 MHz / 1000 MHz / 1400 MHz / 1800 ~1900 MHz
Nominal Impedance:	50 Ω
Polarization:	Linear
V.S.W.R.	< 2.0
Gain:	2dBi



Mechanical Properties

Parameter:	Description
Antenna Type:	External Antenna
Mounting Method:	Screw Type
Connector Type:	SMA (Male)
Antenna Dimensions:	50.2 mm ±1.5
Antenna Color:	Black
Operating Temperature Range:	-40°C~+85°C
Storage Temperature Range:	-40°C~+85°C

Typical applications

- M2M applications
- 433 MHz applications


Description

The ERF4066 Antenna is a black 433 MHz antenna with a SMA (Male) connector. The antenna can also be used in the frequency band of: 1000 MHz / 1400 MHz and 1800~1900 MHz. The antenna can be used for applications such as, M2M and 433 MHz applications.


ERF4066 , 433MHz antenna, SMA Male connector

Antenna Properties

Return Loss

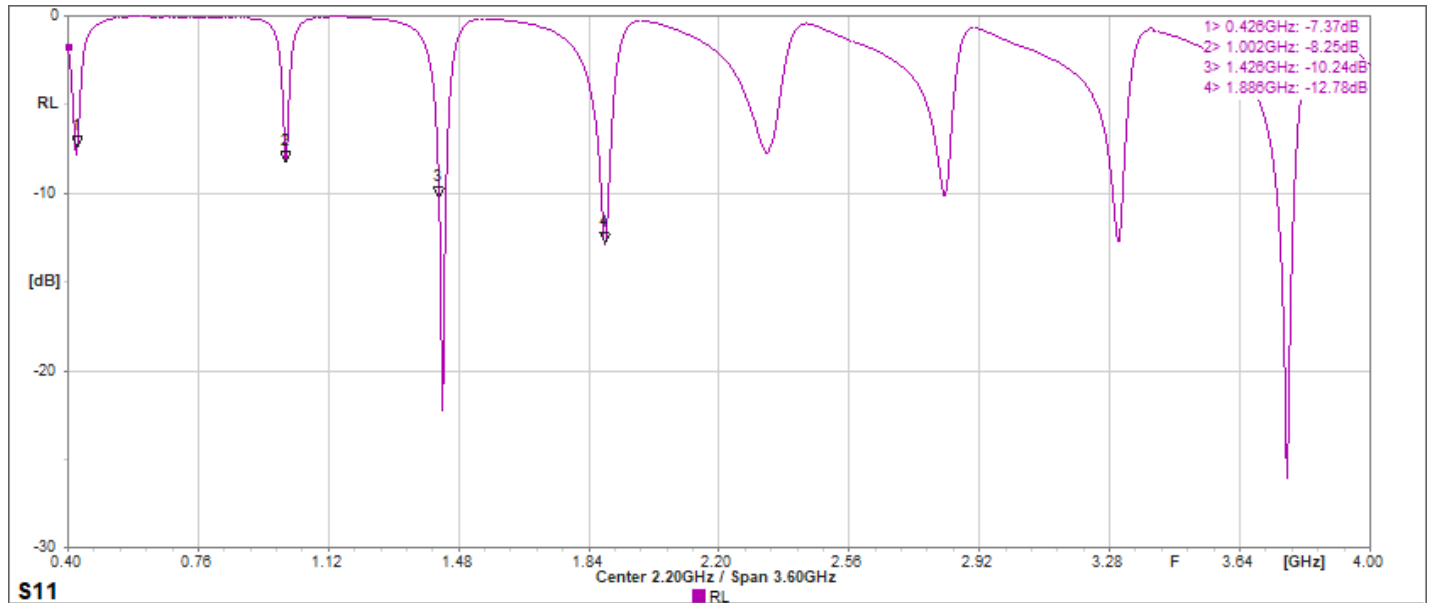


Forward Loss

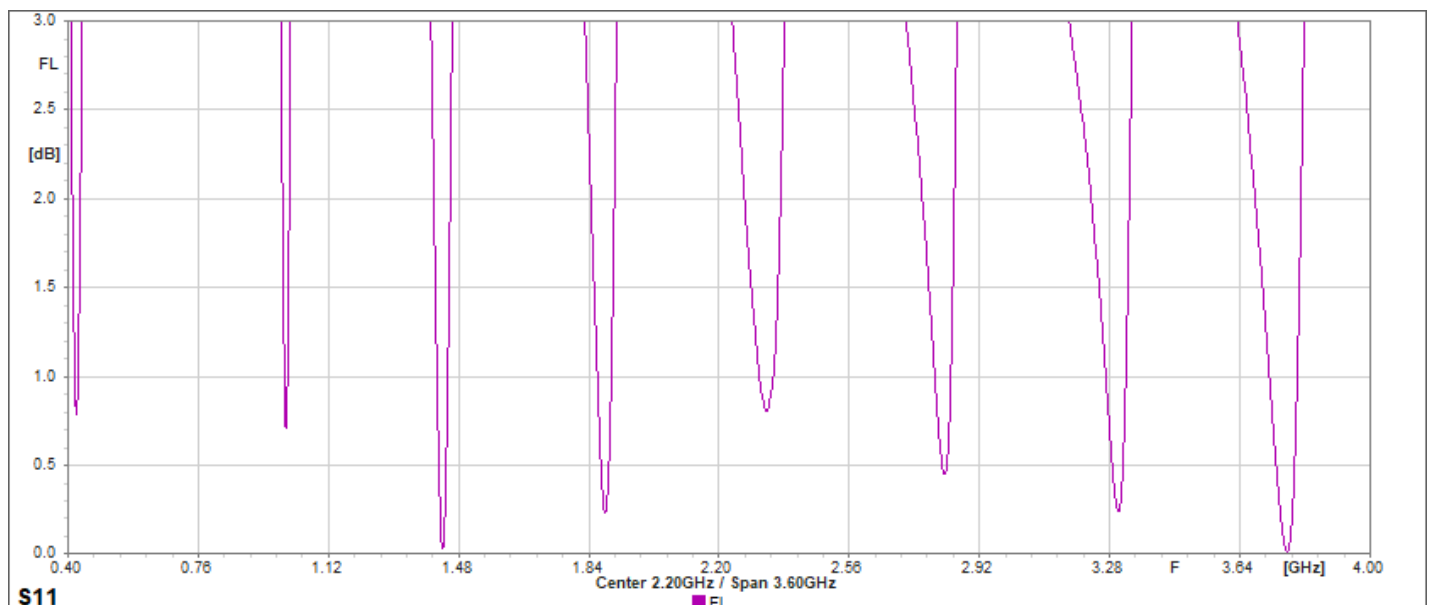


ERF4066 , 433MHz antenna, SMA Male connector

Impedance

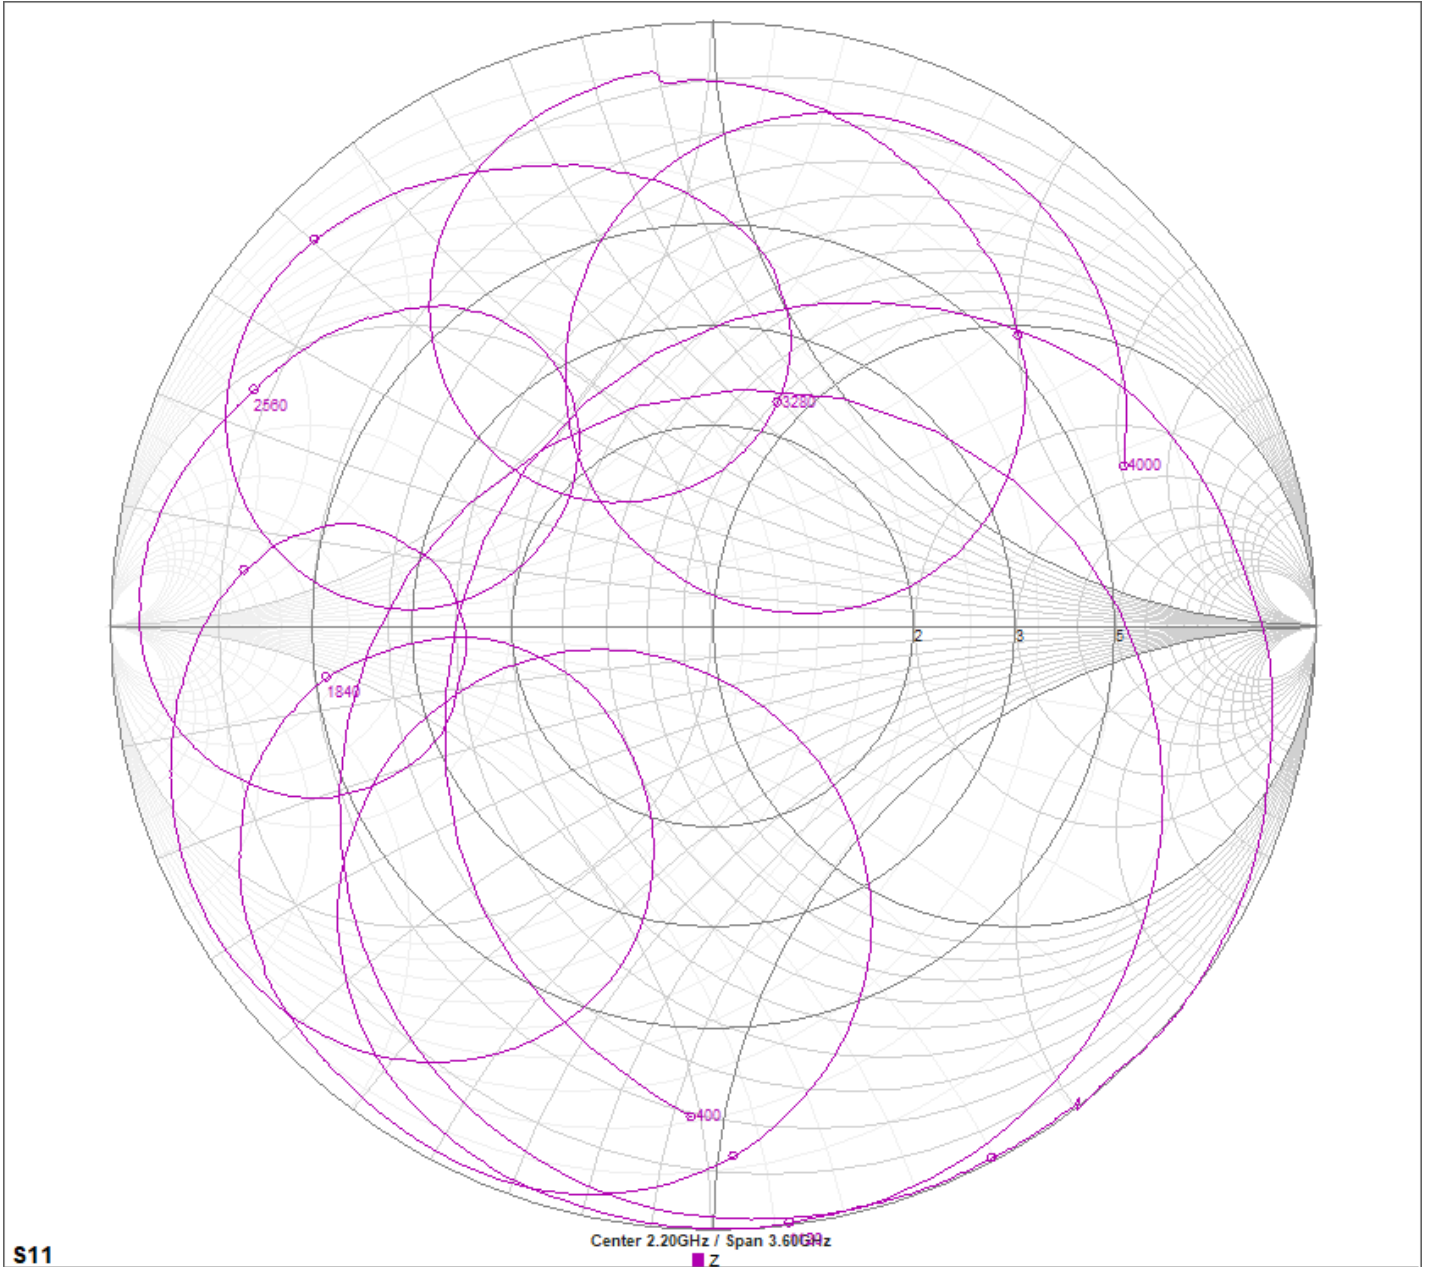

ERF4066 , 433MHz antenna, SMA Male connector

Dimensions

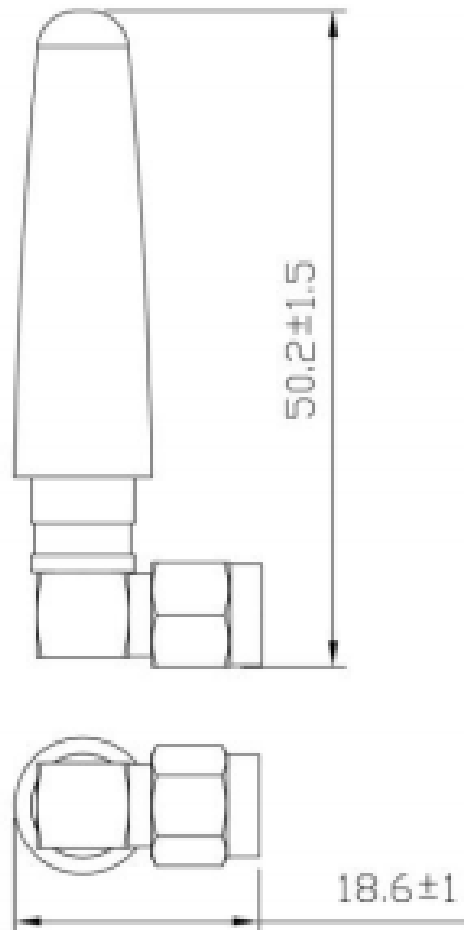

Unit:mm

ERF4066 , 433MHz antenna, SMA Male connector

Different type of SMA connectors

**SMA Male****SMA Female****RP-SMA Male****RP-SMA Female**

The ERF4066 antenna uses the SMA Male connector.

Ordering information

Ordering can be done via www.summit-electronics.com or via info@summit-electronics.com. Please contact us for more information. Customisation of the product is available on request.

Technical support

For all product questions please contact us via info@summit-electronics.com