

ERF5048, RF cable, 300 mm, SMA-Female & U.FL

Features

Mechanical Properties

Parameter:	Description
Connector Type:	SMA Female & U.FL
Cable Length:	300 mm ± 3
Cable type:	Coaxial
Operating Temperature Range:	-20°C~+75°C
Storage Temperature Range:	-40°C~+80°C



Typical applications


- RF Cable assembly
- Antenna accessory

Description

The ERF5048 is a RF-Cable suitable for RF applications. the cable has 1 SMA female connector, and 1 U.FL connector. It can be used for RF cable assemblies, and as an accessory for antenna's.

Dimensions

*unit: mm

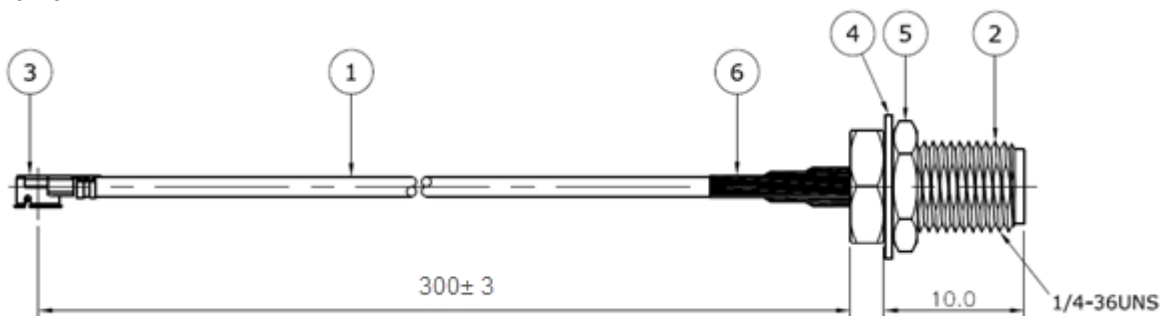

Part	Description
1	Cable ø1.13mm, Black
2	SMA ST. Jack
3	IPEX U.FL
4	Washer, Brass, Gold plating
5	Nut, Brass, Gold plating
6	Heat shrink tube, Black

ERF5048, RF cable, 300 mm, SMA-Female & U.FL

Connector

**SMA Male****SMA Female****RP-SMA Male****RP-SMA Female**

The ERF5048 uses a SMA Female and an U.FL connector.

Ordering information

Ordering can be done via www.summit-electronics.com or via info@summit-electronics.com. Please contact us for more information. Customisation of the product is available on request.

Technical support

For all product questions please contact us via info@summit-electronics.com