


3W, AC/DC Power Converter

SAN03S

SUMMIT
ELECTRONICS

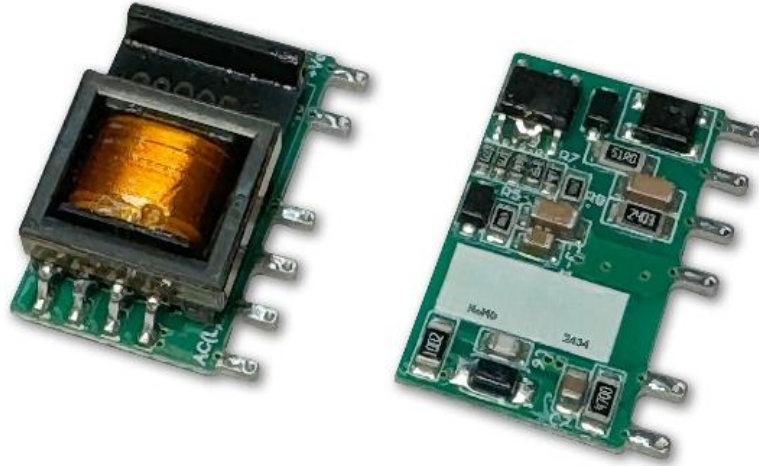

Introduction

SAN03S series are compact size AC/DC power converters, featuring universal input voltage range 90-305VAC, low standby power consumption, high efficiency. They are certified to IEC/EN 62368-1, and EMC performance meets CISPR32, EN55032, ideally suitable for industrial, and critical commercial applications.

Features

- Rated power: 3W
- Universal input: 85~305VAC 47~63Hz
- Regulated single output
- Isolation voltage 4000VAC
- Typical efficiency 68 ... 81%
- Energy saving, standby power only 0.1W
- Operating temperature range: -40~+85°C
- RoHS compliance
- Compact SIP package
- Designed for high reliability and long lifetime
- Certified to IEC/EN 62368, CISPR32, EN55032
- Suitable for both civil and industrial applications
- 3 year warranty

3W, AC/DC Power Converter

SAN03S



Part numbers

Model Number	Input Voltage (VAC)	Output Voltage (VDC)	Output Current (mA) Max	Efficiency (%) Typ.	Capacitive Load (uF) Max.
SAN03S033	85~305VAC 70~430VDC	3.3	600	68	820
SAN03S050		5	600	73	680
SAN03S090		9	333	77	470
SAN03S120		12	250	77	470
SAN03S150		15	200	78	330
SAN03S240		24	125	81	200

* Only typical models are listed, other models may be available, upon request.

3W, AC/DC Power Converter

SAN03S



Electrical characteristics

Unless otherwise indicated, specifications are measured at TA=25°C, humidity <75%, nominal input voltage and rated output load.

Parameter	Condition	Min.	Type	Max.	Unit	Notes
Input voltage range	AC in	85	-	305	VAC	
	DC in	70		430	VDC	
Input frequency		47	-	63	Hz	
Nominal input voltage		100	-	277	VAC	
Input current	115VAC 230VAC	-	-	0.12 0.07	A	
Inrush current Cold start	115VAC 230VAC	-	13 23	-	A	
Output voltage accuracy $I_{OUT}=10\%\sim 100\%$ of $I_{OUT, rated}$		-	± 5	-	%	
Line regulation Full load	$V_{OUT}=3.3V$ Others	-	± 2.5 ± 1.5	-	%	
Load regulation $I_{OUT}=10\%\sim 100\%$ of $I_{OUT, rated}$		-	± 3	-	%	
Ripple and noise 20MHz bandwidth, peak to peak		-	80	150	mV	
Standby power consumption	230VAC	-	0.10	0.15	W	
Temperature coefficient		-	± 0.15	-	%/°C	
Minimum load		10	-	-	%	

3W, AC/DC Power Converter

SAN03S



Output over current protection	Automatic recovery	110	-	-	% I _{OUT}	
Output short circuit protection	Automatic recovery	Continuous, hiccup mode				
Recommended external fuse		1A, slow blow				

* Ripple and noise measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 1uF ceramic capacitor and a 10uF electrolytic capacitor in parallel.

3W, AC/DC Power Converter

SAN03S



General Specifications

Parameters	Condition	Min.	Typ.	Max.	Unit
Isolation voltage 1 minute, leakage current 5mA max	Input to Output	4000	-	-	VAC
Operating temperature range	See “Derating Curve”	-40	-	85	°C
Storage temperature		-40	-	105	°C
Storage humidity		-	-	95	%RH
Soldering temperature	Wave Manual	-	260 360	-	°C
Cooling method		Free air convection			
Safety class		Class II, no FG			
MTBF	MIL-HDBK- 217F	>1,000,000 Hours, 25°C			
Design based on standards		UL/EN/IEC 62368-1, EN/IEC 60335-1, EN/IEC 61558-1			
Safety certifications		EN/IEC 62368-1			
EMC		CISPR32, EN55032 Class B with external circuit			
Size, and Weight		26.4x11.0x14.8mm, 5.9g			

3W, AC/DC Power Converter


SAN03S




Characteristics Curves

Derating Curve

Output vs Ambient Temperature

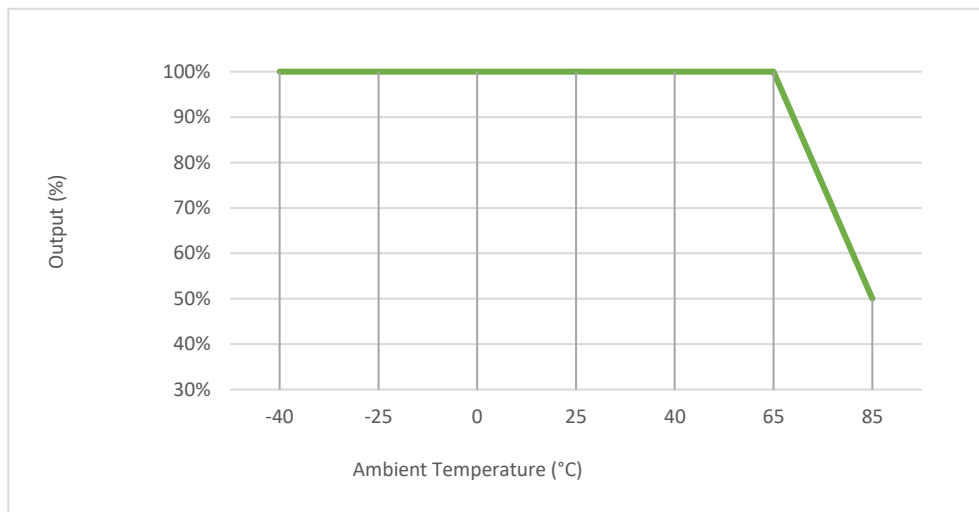

Output vs Voltage

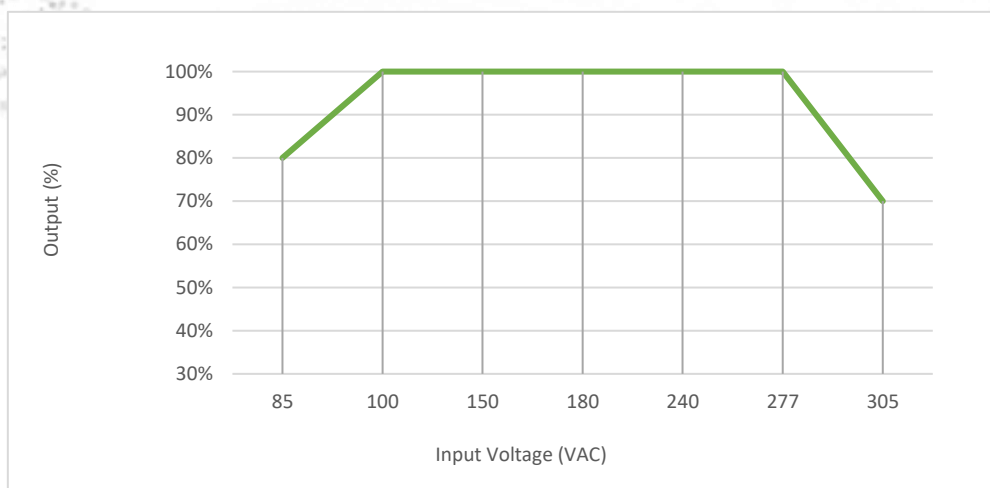


3W, AC/DC Power Converter

SAN03S




Efficiency Curves

Efficiency vs Input Voltage

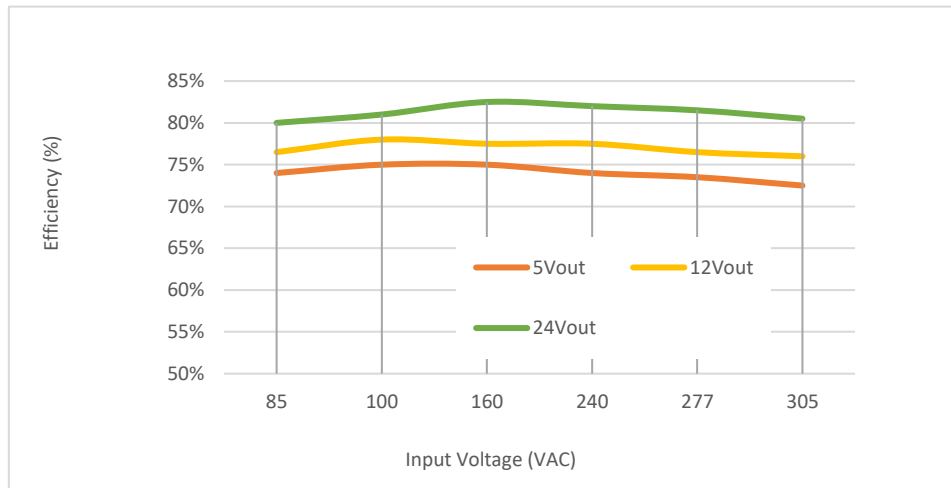

Full load

Efficiency vs Load

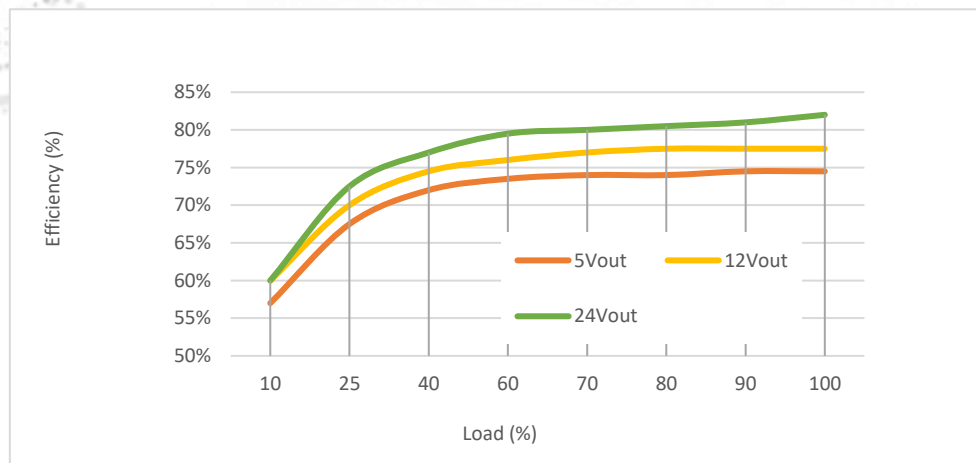

V_{IN}=230VAC

3W, AC/DC Power Converter SAN03S



Recommended External Circuit

Typical External Circuit

This circuit is the basic design reference, components with “” are required for the converter’s operating.

*FUSE to be 1A, slow blow and is also required for safety.

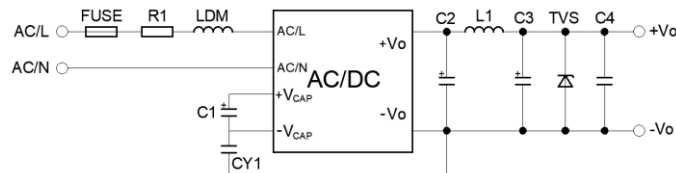


Figure 1: Typical external circuit

Recommended Component Spec [Table 1]

V _{OUT} [V]	C1*	C2*	C3*	C4	CY1*	L1*	TVS
3.3, 5	10uF, 450V	470uF, 16V	150uF, 35V	0.1uF, 50V	1nF, 400VAC	2.2uH, 3A	SMBJ7.0A
9, 12	10uF, 450V	270uF, 25V	150uF, 35V	0.1uF, 50V	1nF, 400VAC	2.2uH, 3A	SMBJ12A
15, 24	10uF, 450V	470uF, 35V	100uF, 35V	0.1uF, 50V	1nF, 400VAC	3.3uH, 3A	SMBJ20A

* For further questions contact one of our sales representatives.

Circuit for EMC Enhancement

*This application circuit is recommended for EMC enhancement. It is not mandatory if this is not critical in the application.

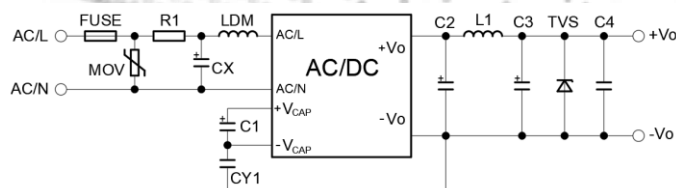


Figure 2. External circuit design for EMC enhancement

Recommended Component Spec [Table 2]

Item	FUSE*	MOV	CX	R1*	LDM
Spec	2A, 300V	S14K350	0.1uF, 310VAC	12 Ohm, 3W	2.2mH, 0.2A

Components above with “” are required for the converter’s operating. “R1” is wire-wound resistor.


*Refer to Table 1 for components at the output.

3W, AC/DC Power Converter

SAN03S



Mechanical Specifications

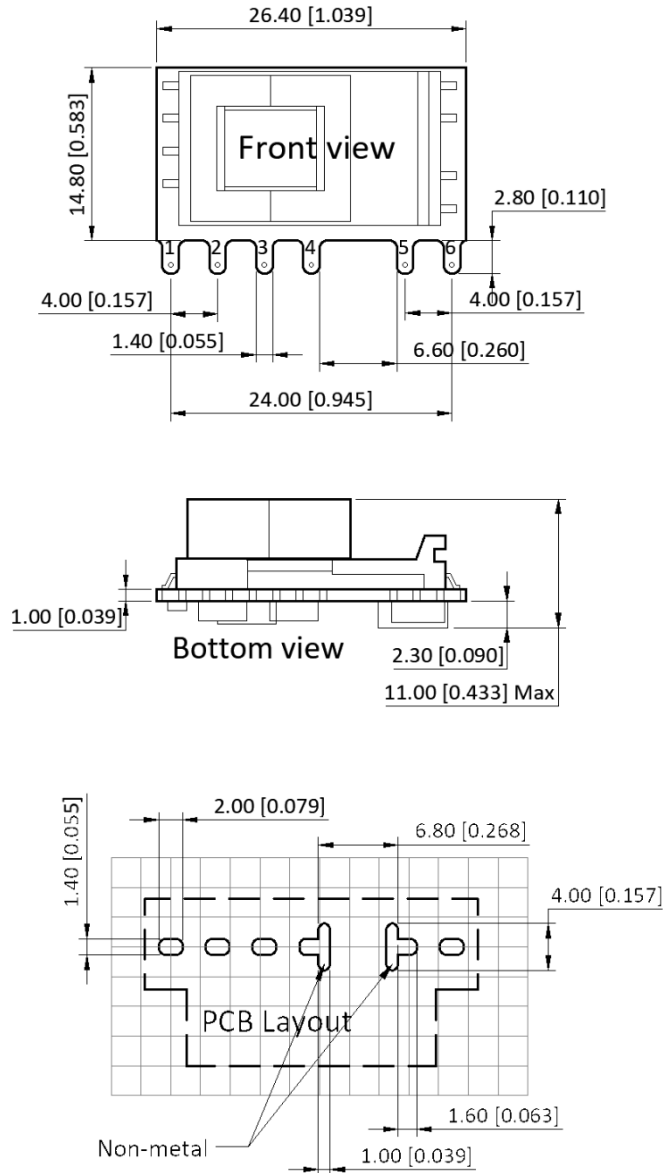

Pin Definition

Pin #	Single Out	
1	AC (L)	
2	AC (N)	
3	+V (CAP)	
4	-V (CAP)	
5	-V _{OUT}	
6	+V _{OUT}	

- * Unless otherwise specified unit: mm [inch]
- * General tolerance: ± 1.00 [± 0.040]
- * Pin thickness: ± 0.10 [± 0.004]
- * Footprint grid 2.54 x 2.54 mm

3W, AC/DC Power Converter

SAN03S



Ordering information

Ordering can be done via www.summit-electronics.com or via info@summit-electronics.com. Please contact us for more information. Customisation of the product is available on request.

Technical support

For all product questions please contact us via info@summit-electronics.com

Document revision

Rev	Date	Changes
2025v0.1	19-08-2025	First issue of document