

30W, AC/DC Power Converter

SAP30H

SUMMIT
ELECTRONICS



Introduction

SAP30H series are compact size AC/DC power converters, featuring universal input voltage range, low stand by power consumption, high efficiency. Designed for high reliability industrial applications, these converters are encapsulated to protect from dust and moisture. They are certified to IEC/EN/UL62368-1, EN60335, EN61558 and EMC performance meets CISPR32, EN55032 Class B without external components, ideally suitable for industrial, and critical commercial applications.

Features

- Rated power: 30W Max
- Universal input: 85~305VAC, 47~63Hz
- Regulated single output
- Isolation voltage 4200VAC
- Typical efficiency 85 ... 90%
- Energy saving, standby power only less than 0.1W
- Operating temperature range: -40~+85°C
- RoHS compliance
- Compact DIP package
- Over voltage, over current and short circuit protection
- Meet CISPR32, EN55032 Class B without external component
- Certified to IEC/EN/ UL62368 OVC III, and UKCA, EN 60335, EN 61558, FCC etc.
- 3 year warranty

30W, AC/DC Power Converter

SAP30H



Part numbers

Model Number	Input Voltage (VAC)	Output Voltage (VDC)	Output Current [mA] Rated	Efficiency [%] Typ.	Capacitive Load [uF] Max.
SAP30H033	85~305VAC 100~430VDC	3.3	6000	85	6600
SAP30H050		5	6000	86	6600
SAP30H090		9	3400	88	4400
SAP30H120		12	2500	90	4400
SAP30H150		15	2000	90	3300
SAP30H240		24	1300	88	1000
SAP30H480		48	625	90	470

* Only typical models are listed, other models may be available, upon request.

30W, AC/DC Power Converter

SAP30H



Electrical characteristics

Unless otherwise indicated, specifications are measured at TA=25°C, humidity <75%, nominal input voltage and rated output load.

Parameter	Condition	Min.	Type	Max.	Unit	Note
Input Voltage Range	AC in	85	-	305	VAC	
	DC in	100	-	430	VDC	
Input Frequency		47	-	63	Hz	
Nominal Input Voltage		100	-	277	VAC	
Input current	115VAC 230VAC	-	-	0.75	A	
		-	-	0.50		
Inrush current Cold start	115VAC 230VAC	-	20	-	A	
		-	50	-		
Leakage current	277VAC, 50Hz	-	-	0.1	mA RMS	
Output voltage accuracy	Vout=3.3V	-	±3	-	%	
	others	-	±2	-		
Line regulation	Full load	-	±0.5	-	%	
Load regulation IOUT=0%~100% of IOUT, rated	Vout=24, 48V Others	-	±2.0	-	%	
			±1.5			
			±1.0			
Ripple and noise 20MHz band- width, peak to peak	Vout=24, 48V	-		150	mV	
	others			100		
Temperature coefficient		-	±0.02	-	%/ °C	
Standby power consumption	Vout=24, 48V	-	0.15	0.2	W	
	others		0.10	0.12		
Hold up time Full load	115VAC 230VAC	-	10	-	mS	
			50			
Over voltage protection	Vout=3.3V Vout =5, 9, 12V	-	-	6.3	VDC	
				16		

30W, AC/DC Power Converter

SAP30H



Hiccup or clamping by Zener diode	Vout =15V Vout =24V Vout =48V			25 35 60		
Over current protection	Automatic recovery	110	-	-	% Iout	
Short circuit protection		Continuous, hiccup mode, automatic recovery				
Built in fuse		2A, 300V, slow blow				
Minimum load		No minimum load is required				

* Ripple and noise measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 1uF ceramic capacitor and a 10uF electrolytic capacitor in parallel.

30W, AC/DC Power Converter

SAP30H



General Specifications

Parameters	Condition	Min.	Typ.	Max.	Unit
Isolation voltage Tested for 1 minute	I/P to O/P	4200	-	-	VAC
Isolation resistance 500VDC, 25°C, 70%RH	I/P to O/P	100	-	-	M Ohm
Switching frequency		-	65	-	KHz
Operating temperature range	See "Derating Curve"	-40	-	85	°C
Storage temperature		-40	-	85	°C
Storage humidity		10	-	95	%RH
Maximum case temperature		-	-	95	°C
Soldering temperature	Wave Manual	-	260 360	-	°C
Case material		Black plastic UL94-V0			
Cooling method		Free air convection			
Vibration		10Hz to 55Hz, 10G, 30 minutes along X, Y and Z axis			
Class II power		Yes, no FG			
MTBF	MIL-HDBK-217F	> 1,500,000 Hours, 25°C			
Design based on standards		RoHS & REACH directives, IEC/EN/UL 62368, OVC III, FCC, UKCA, IEC EN 60335, IEC EN 61558			
Safety certifications		IEC/EN/UL 62368-1, OVC III, FCC, UKCA, IEC EN 60335, IEC EN 61558			
EMC (1) With External Circuit as shown in "Figure 1"	CE ESD RS EFT Surge	CISPR32, EN55032 Class B with "NO External Circuit" IEC/EN61000-4-2, Contact ±6kV, Air ±8kV, Criteria B IEC/EN61000-4-3, 10V/m, Criteria A IEC/EN61000-4-4, ±2kV, Criteria B			

30W, AC/DC Power Converter

SAP30H



(2) With External Circuit as shown in "Figure 2"	CS DIP	IEC/EN61000-4-5, Line to Line ± 2 kV, Criteria B IEC/EN61000-4-6, 10Vrms, Criteria A IEC/EN61000-4-11, 0%, 70%, Criteria B
Size, and Weight		69.5x39.0x24mm, 100g
Packing		120pcs/Carton, size: 335x345x210mm, 12.5Kg G.W.

30W, AC/DC Power Converter


SAP30H

SUMMIT
ELECTRONICS


Characteristics Curves

Derating Curve

Output vs Ambient Temperature

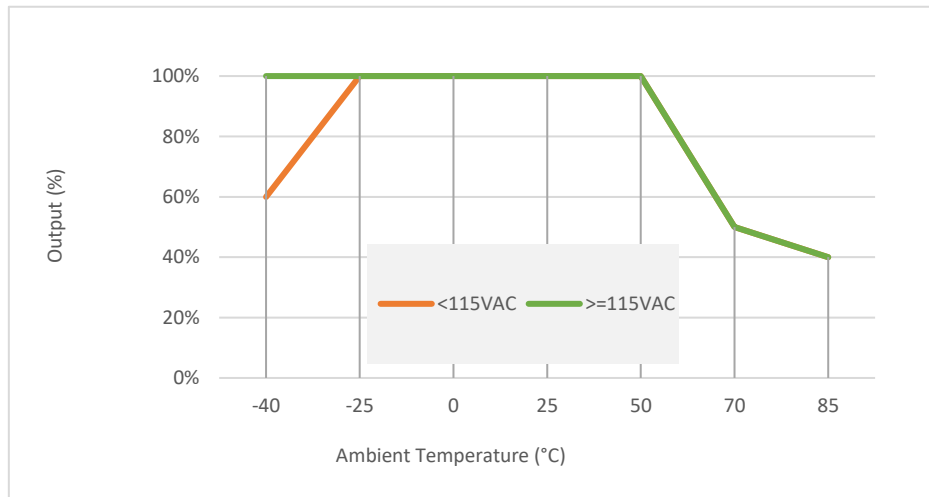

$V_{OUT}=5V$

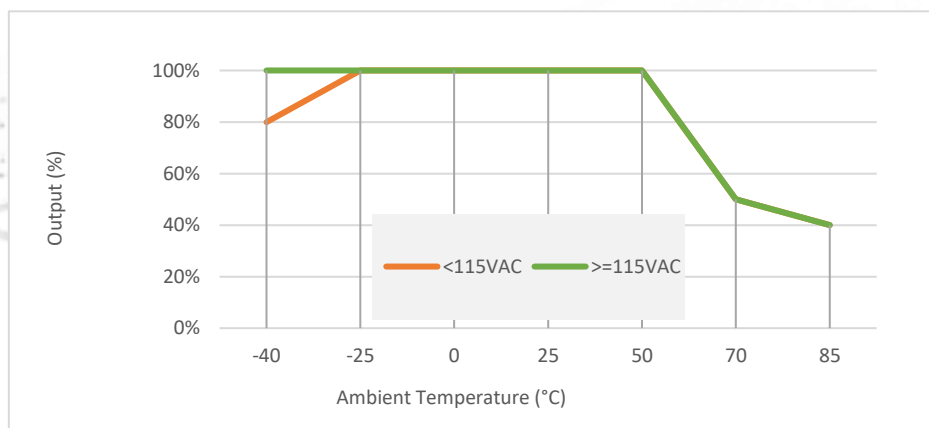


$V_{OUT}=others$

30W, AC/DC Power Converter


SAP30H



Output vs Input Voltage

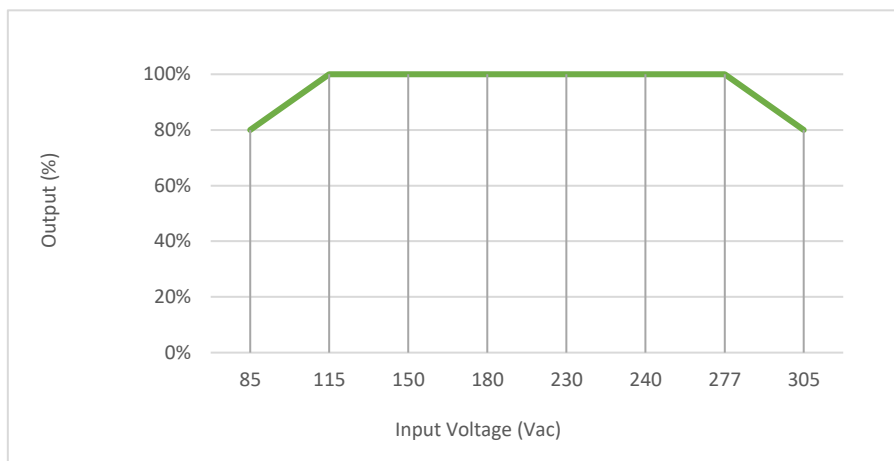

Output vs Altitude

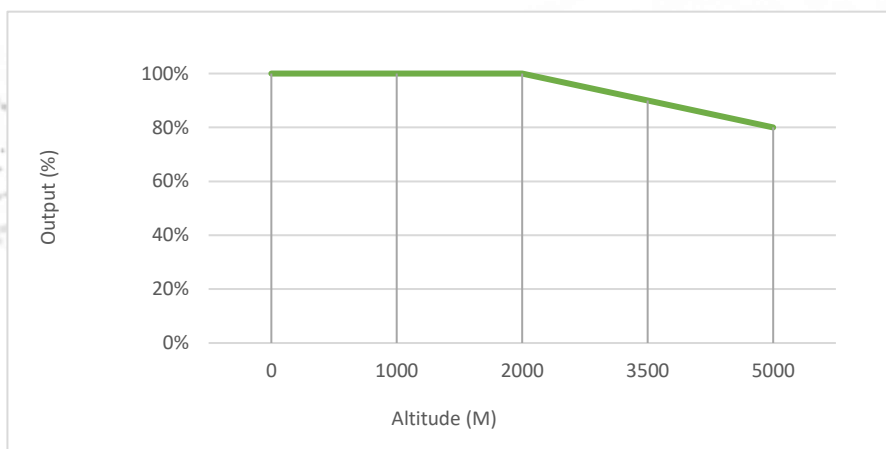


30W, AC/DC Power Converter

SAP30H




Efficiency Curves

Efficiency vs Input Voltage

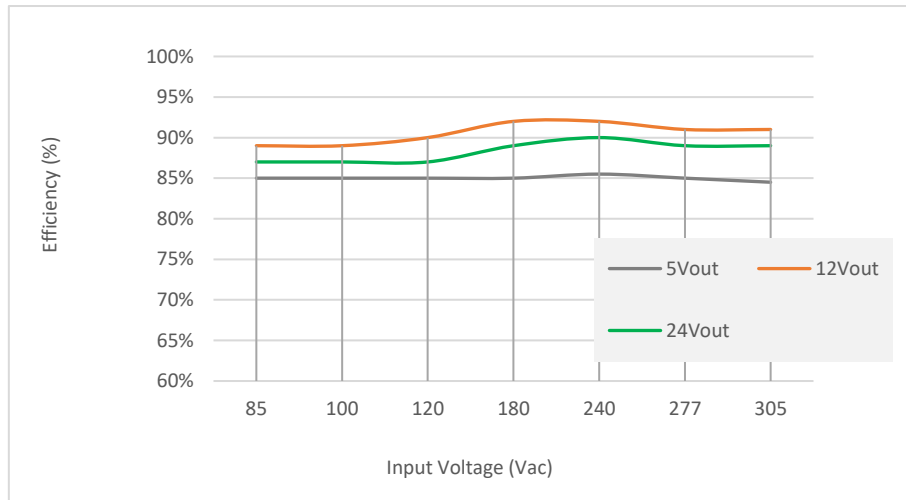

Efficiency vs Load

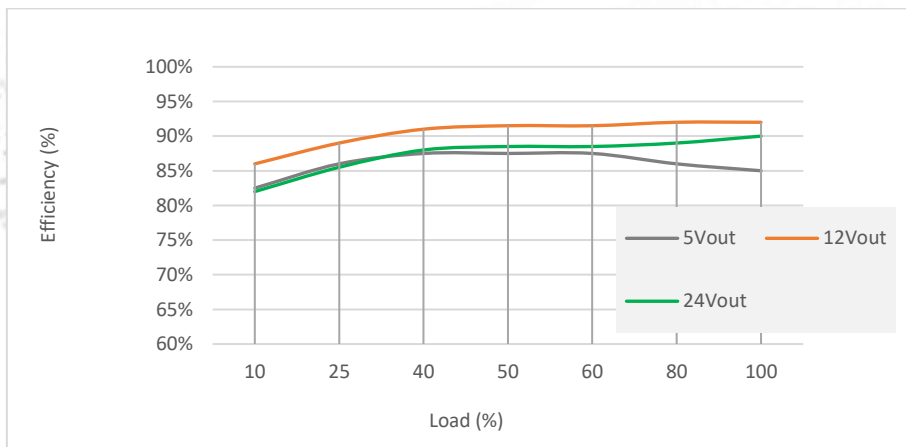


30W, AC/DC Power Converter

SAP30H



Mechanical Specifications

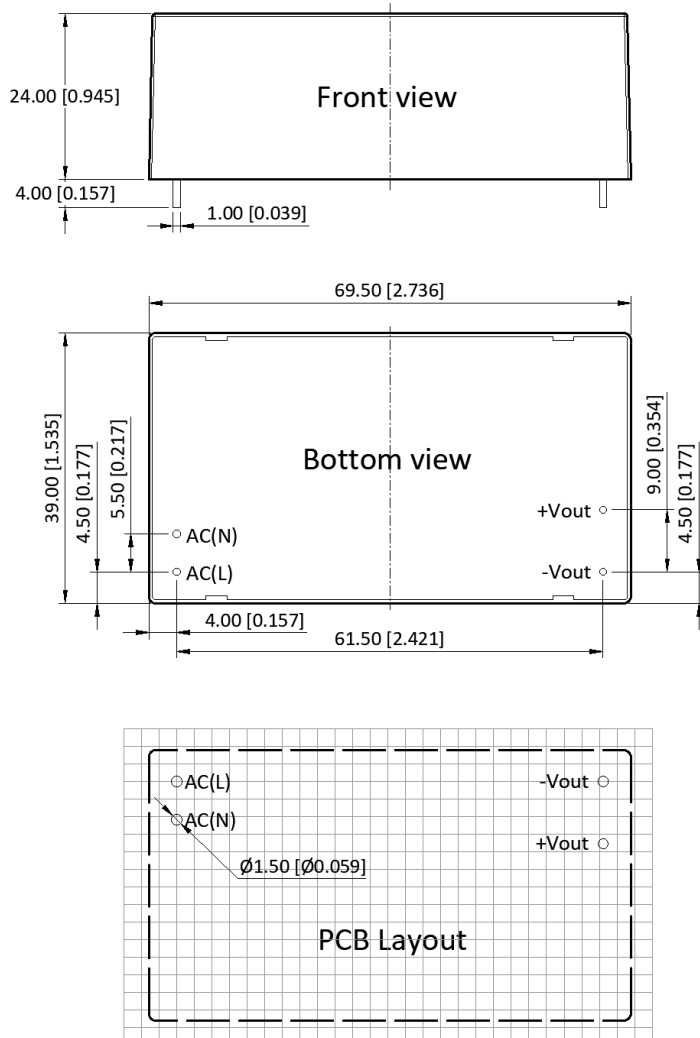

Pin Definition

Pin #	Single Out	
1	AC (L)	
2	AC (N)	
3	+V _{OUT}	
4	-V _{OUT}	

* Unless otherwise specified
unit: mm [inch]

* General tolerance: ± 1.00
[± 0.040]

* Pin thickness: ± 0.15 [± 0.006]

* Pin distance: ± 0.50 [± 0.020]

* Footprint grid 2.54 x 2.54 mm

30W, AC/DC Power Converter

SAP30H



Ordering information

Ordering can be done via www.summit-electronics.com or via info@summit-electronics.com. Please contact us for more information. Customisation of the product is available on request.

Technical support

For all product questions please contact us via info@summit-electronics.com

Document revision

Rev	Date	Changes
2025v0.1	26-08-2025	First issue of document