

1W, DC/DC Power Converter

SDB01T

SUMMIT
ELECTRONICS



Introduction

The SDB01T series are SMD package DC/DC converters with tightly regulated single output, and 3KVDC isolation. These converters feature high efficiency, low ripple and noise, short circuit protection, and wide operating temperature range. They are widely used in distributed power system in industrial applications where isolation and voltage converting is needed.

Features

- Rated power: 1W Max
- Input voltage range $\pm 5\%$
- Regulated output
- High efficiency up to 71%
- Isolation voltage 3KVDC
- Operating temperature range: $-40 \sim +85^{\circ}\text{C}$ ambient
- No external components required for operating
- RoHS compliant
- Industrial standard SMD package
- Continuous short circuit protection
- Meet EN/IEC 62368-1
- 3 year warranty

1W, DC/DC Power Converter

SDB01T



Part numbers

Model Number	Input Voltage [VDC] $\pm 5\%$	Output Voltage (VDC)	Output Current (mA) Max	Output Current (mA) Min	Efficiency (%) Typ.	Capacitive Load (μ F) Max.
SDB01T0503	5	3.3	250	25	66	2400
SDB01T0505	5	5	200	20	69	2400
SDB01T0509	5	9	111	12	70	1000
SDB01T0512	5	12	84	9	71	560
SDB01T0515	5	15	67	7	71	560
SDB01T0524	5	24	41	4	71	100
SDB01T1205	12	5	200	20	69	2400
SDB01T1212	12	12	84	9	71	560
SDB01T1215	12	15	67	7	71	220
SDB01T1505	15	5	200	20	68	2400
SDB01T2405	24	5	200	20	69	2400
SDB01T2412	24	12	84	9	71	560
SDB01T2415	24	15	67	7	71	220

* Only typical models are listed. Other models may be available upon request.

1W, DC/DC Power Converter

SDB01T



Electrical characteristics

Unless otherwise indicated, specifications are measured at $T_A=25^{\circ}\text{C}$, nominal input voltage, full load after warm up.

Parameter	Condition	Min.	Type	Max.	Unit	Note
Input current Full load	$V_{IN}=5\text{V}$		290			
	$V_{IN}=12\text{V}$		120			
	$V_{IN}=15\text{V}$	-	100	-	mA	
	$V_{IN}=24\text{V}$		60			
Input current No load		-	6	-	mA	
Reflected Ripple Current		-	30	-	mA	
Output voltage accuracy		-	-	± 3	%	
Line regulation For V_{IN} change of $\pm 1\%$		-	-	± 0.25	%	
Load regulation $I_{OUT}=10\%$ to 100% of $I_{OUT, rated}$	$V_{OUT}=3.3\text{V}$			± 3		
	Others	-	-	± 2	%	
Output ripple and noise 20MHz bandwidth		-	30	100	mVp-p	
Temperature coefficient	Full load	-	± 0.02	-	%/ $^{\circ}\text{C}$	
Output short circuit protection		Continuous, automatic recovery				
Input filter		Capacitor				
Hot plug		None				
Input current Full load						

* Operating with less than 10% of rated load will not cause permanent damage to the converters, but the performances data may not fall into the specifications, and reliable operating is not assured.

1W, DC/DC Power Converter

SDB01T



General Specifications

Parameters	Condition	Min.	Typ.	Max.	Unit	Notes
Isolation voltage 1 minute, leakage current 1mA max	Input to Output	3000	-	-	VDC	
Isolation resistance 500VDC	Input to Output	1000	-	-	M ohm	
Isolation capacitance 100KHz, 0.1V	Input to Output	-	20	-	pF	
Operating temperature	See "Derating Curve"	-40	-	+85	°C	
Storage temperature		-55	-	+125	°C	
Temperature rise at full load		-	25	-	°C	
Storage humidity		5	-	95	%RH	
Switching frequency	Full load	-	260	-	KHz	
Reflow soldering temperature		Peak temp. 217 - 245°C, maximum duration 60s				
Vibration		10-150Hz, 5G, 0.75mm along X, Y and Z				
Case material		Black plastic UL94-V0				
Cooling method		Free air convection				
Design based on standards		UL/EN/IEC 62368-1				
Safety certifications		EN/IEC 62368-1				
EMC	Emissions Immunity	CISPR32, EN55032 Class B* IEC/EN61000-4-2, Air ±8KV, Contact ±4KV, Criteria B				

1W, DC/DC Power Converter

SDB01T



MTBF	MIL-HDBK-217F	>3,500,000 Hours, T _A =25°C
Moisture sensitivity level (MSL)		IPC/JEDEC J-STD-020D.1 Level 1
Size & Weight		15.24 x 11.4 x 7.25 mm, 1.5g Typ.

1W, DC/DC Power Converter


SDB01T



Characteristics Curves

Derating Curve

Output vs Ambient Temperature

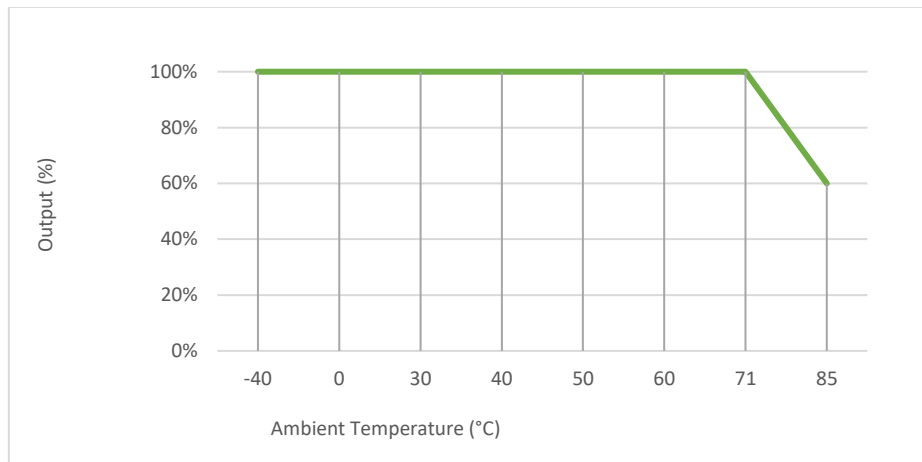

1W, DC/DC Power Converter

SDB01T

Recommended External Circuit

Typical Application Circuit

*Typical application circuit is to further lower the input and output ripple. It is not required for general use.

*Recommended component specifications are typical values. Excessive external capacitive load may cause startup problem.

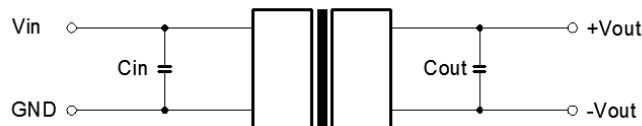


Figure 1: Typical External circuit

Recommended component spec

Input voltage	5V	12V	15V	24V
C _{IN}	4.7uF, 25V	2.2uF, 16V	1uF, 25V	1uF, 50V

Recommended component spec

Output voltage	3.3, 5V	9, 12V	15, 24V
C _{OUT}	10uF, 16V	2.2uF, 25V	1uF, 50V

Circuit for EMC Enhancement

*Use this application circuit to meet Class B EMC performance.

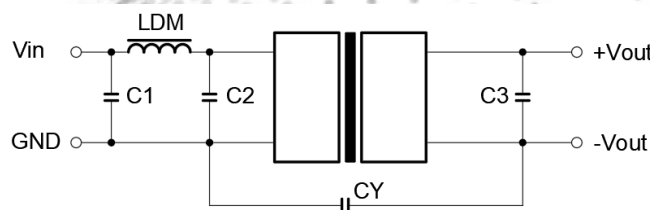


Figure 2: Circuit for EMC Enhancement

Recommended component spec

Component	LDM	C1, C2	CY
Spec	6.8uH	4.7uF, 50V	270pF, 3KV


*C3 refer to C_{OUT} in [Table 2]

1W, DC/DC Power Converter

SDB01T



Mechanical Specifications

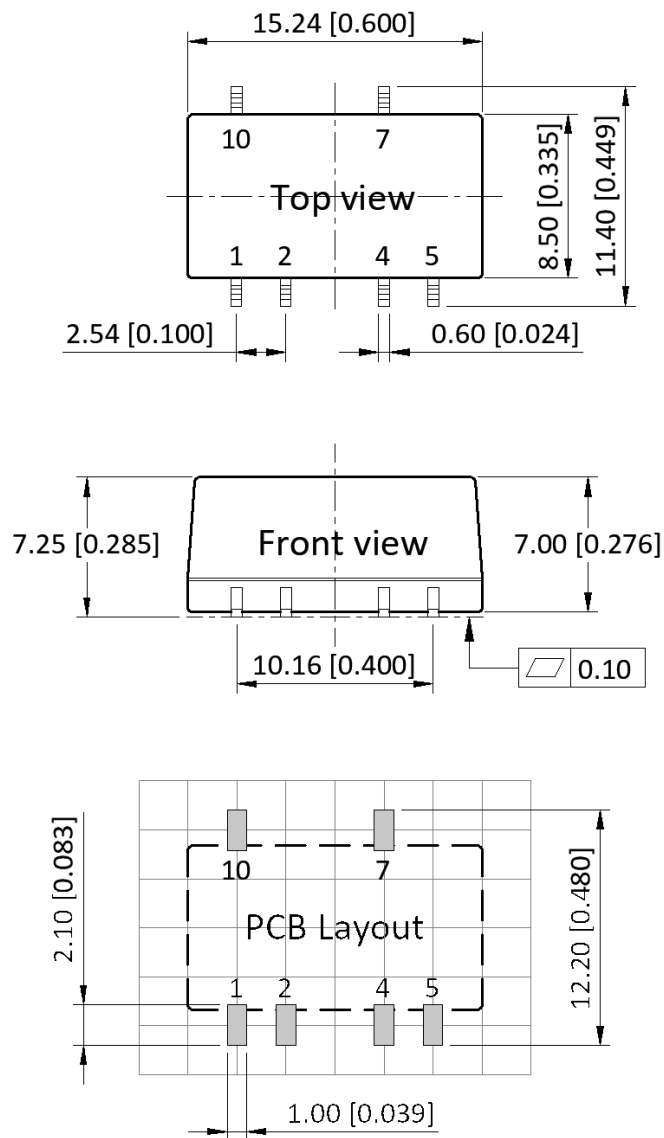

Pin Definition

Pin #	Single Out	
1	GND	
2	V _{IN}	
4, 5	0V	
7	+V _{OUT}	
10	No Connection	

* Unless otherwise specified unit:
mm [inch]

* General tolerance: ± 0.25 [± 0.010]

* Pin thickness: ± 0.10 [± 0.004]

* Footprint grid 2.54 x 2.54 mm

1W, DC/DC Power Converter

SDB01T



Ordering information

Ordering can be done via www.summit-electronics.com or via info@summit-electronics.com. Please contact us for more information. Customisation of the product is available on request.

Technical support

For all product questions please contact us via info@summit-electronics.com

Document revision

Rev	Date	Changes
2025v0.1	27-08-2025	First issue of document