


1W, DC/DC Power Converter

SDM01S

SUMMIT
ELECTRONICS

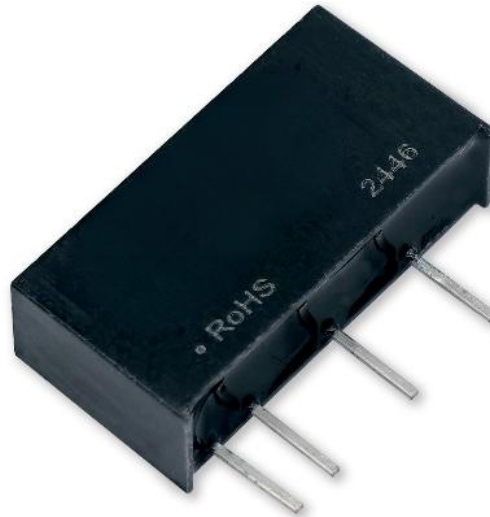

Introduction

The SDM01S series are unregulated SIP7 package DC/DC converters with single or dual outputs, and 1.5KVdc isolation. These converters feature high efficiency, low ripple and noise, continuous short circuit protection, and wide operating temperature range. They are widely used in distributed power system in industrial applications where isolation and voltage converting is needed.

Features

- Rated power: 1W Max
- Input voltage range $\pm 10\%$
- Unregulated output
- High efficiency, up to 89%
- Small no load input current
- Isolation voltage 1.5KVdc
- Operating temperature range: $-40 \sim +105^{\circ}\text{C}$ ambient
- RoHS compliant
- Compact SIP7 package
- Continuous short circuit protection
- Designed to meet UL/EN/IEC 62368-1
- 3 year warranty

1W, DC/DC Power Converter

SDM01S



Part numbers

Model Number	Input Voltage [VDC] $\pm 10\%$	Output Voltage (VDC)	Output Current (mA) Max	Output Current (mA) Min	Efficiency (%) Typ.	Capacitive Load (μ F) Max.
SDM01S0303	3.3	3.3	303	30	82	4000
SDM01S0305	3.3	5	200	20	83	4000
SDM01S0309	3.3	9	111	11	84	2000
SDM01S0312	3.3	12	84	8	85	1000
SDM01S0315	3.3	15	67	7	85	680
SDM01S0324	3.3	24	42	4	84	560
SDM01S0503	5	3.3	303	30	83	4000
SDM01S0505	5	5	200	20	86	4000
SDM01S0509	5	9	111	12	86	2000
SDM01S0512	5	12	84	9	88	1000
SDM01S0515	5	15	67	7	88	680
SDM01S0524	5	24	42	4	89	560
SDM01S0503D	5	± 3.3	± 152	± 15	76	2000
SDM01S0505D	5	± 5	± 100	± 10	86	2000
SDM01S0509D	5	± 9	± 56	± 6	86	1000
SDM01S0512D	5	± 12	± 42	± 5	88	560
SDM01S0515D	5	± 15	± 34	± 4	88	220
SDM01S0524D	5	± 24	± 21	± 3	88	100
SDM01S1203	12	3.3	303	30	84	4000
SDM01S1205	12	5	200	20	86	4000
SDM01S1209	12	9	111	12	87	2000

1W, DC/DC Power Converter

SDM01S



SDM01S1212	12	12	84	9	87	1000
SDM01S1215	12	15	67	7	88	680
SDM01S1224	12	24	42	4	89	560
SDM01S1203D	12	±3.3	±152	±15	84	2000
SDM01S1205D	12	±5	±100	±10	86	2000
SDM01S1209D	12	±9	±56	±6	87	1000
SDM01S1212D	12	±12	±42	±5	87	560
SDM01S1215D	12	±15	±34	±4	88	220
SDM01S1224D	12	±24	±21	±3	84	100
SDM01S1505	15	5	200	20	86	4000
SDM01S1509	15	9	111	12	87	2000
SDM01S1512	15	12	84	9	87	1000
SDM01S1515	15	15	67	7	88	680
SDM01S1524	15	24	42	5	84	560
SDM01S1505D	15	±5	±100	±10	86	2000
SDM01S1512D	15	±12	±42	±5	87	560
SDM01S1515D	15	±15	±34	±4	88	220
SDM01S1524D	15	±24	±21	±2	84	100
SDM01S2403	24	3.3	303	30	84	4000
SDM01S2405	24	5	200	20	87	4000
SDM01S2409	24	9	111	12	88	2000
SDM01S2412	24	12	84	9	88	1000
SDM01S2415	24	15	67	7	88	680
SDM01S2424	24	24	42	4	89	560
SDM01S2405D	24	±5	±100	±10	87	2000
SDM01S2409D	24	±9	±56	±6	88	1000

1W, DC/DC Power Converter

SDM01S



SDM01S2412D	24	±12	±42	±5	88	560
SDM01S2415D	24	±15	±34	±4	88	220
SDM01S2424D	24	±24	±21	±3	84	100

* Only typical models are listed. Other models may be available upon request.

* See SDM01S series for 3KVDC isolation models, and SDG01S series for 6KVDC isolation models.

1W, DC/DC Power Converter

SDM01S



Electrical characteristics

Unless otherwise indicated, specifications are measured at TA=25°C, humidity <75%, nominal input voltage and rated output load.

Parameter	Condition	Min.	Type	Max.	Unit	Note
Input current	V _{IN} =3.3V	-	370	-	mA	
Full load	V _{IN} =5V		230			
	V _{IN} =12V		99			
	V _{IN} =15V		78			
	V _{IN} =24V		51			
Input current		-	3	-	mA	
No load						
Reflected ripple current		-	15	-	mA	
Surge voltage	V _{IN} =3.3V	-0.7	-	5	VDC	
1 second max	V _{IN} =5V	-0.7		9		
	V _{IN} =12V	-0.7		18		
	V _{IN} =15V	-0.7		21		
	V _{IN} =24V	-0.7		30		
Output voltage accuracy	All models	Refer to graphic in “Characteristic Curves” section				
Line regulation	V _{OUT} =3.3V	-	-	±1.5	%	
For V _{IN} change of ±1%	All others			±1.2		
Load regulation	V _{OUT} =3.3V	-	10	-	%	
I _{OUT} =10% to 100% of I _{OUT} , rated	V _{OUT} =5V		8			
	V _{OUT} =9V		8			
	V _{OUT} =12V		7			
	V _{OUT} =15V		6			
	V _{OUT} =24V		6			

1W, DC/DC Power Converter

SDM01S



Output ripple and noise	20MHz bandwidth	-	45	100	mVp-p	
Temperature coefficient	Full load	-	±0.03	-	%/°C	
Output short circuit protection		Continuous, automatic recovery				
Input filter		Capacitor				
Hot plug		None				

* Operating with less than 10% of rated load will not cause permanent damage to the converters, but the performances data may not fall into the specifications, and reliable operating is not assured.

* Dual output models need to operate with balanced load. The load difference between two outputs over 10% may cause unstable operating of the converter.

1W, DC/DC Power Converter

SDM01S



General Specifications

Parameters	Condition	Min.	Typ.	Max.	Unit
Isolation voltage Tested for 1 minute, leakage current less than 1mA	Input to Output	1500	-	-	VDC
Isolation resistance Tested at 500VDC	Input to Output	1000	-	-	M ohm
Isolation capacitance Tested at 100KHz, 0.1V	Input to Output	-	20	-	pF
Operating temperature	See "Derating Curve"	-40	-	+105	°C
Storage temperature		-55	-	+125	°C
Temperature rise at case		-	25	-	°C
Storage humidity	Non-condensing	5	-	95	%RH
Switching frequency	Full load	-	220	-	KHz
Pin soldering resistance 1.5mm away from case for 10 sec		-	-	300	°C
Case material		Black plastic UL94-V0			
Cooling method		Free air convection			
Vibration		10-150Hz, 5G, 0.75mm along X, Y and Z			
Design based on standards		UL/EN/IEC 62368-1			
Safety certifications		EN/IEC 62368-1			
EMC	Emissions	CISPR32, EN55032 Class B*			
	Immunity	IEC/EN61000-4-2			

1W, DC/DC Power Converter

SDM01S



MTBF	MIL-HDBK-217F	>3,500,000 Hours, T _A =25°C
Size		19.65 x 6.00 x 10.16 mm
Weight		2.1g Typ.

*External circuit is required in order to meet Class B, refer to Figure 2 in Recommended External Circuit

1W, DC/DC Power Converter


SDM01S




Characteristics Curves

Derating Curve

Output vs Ambient Temperature

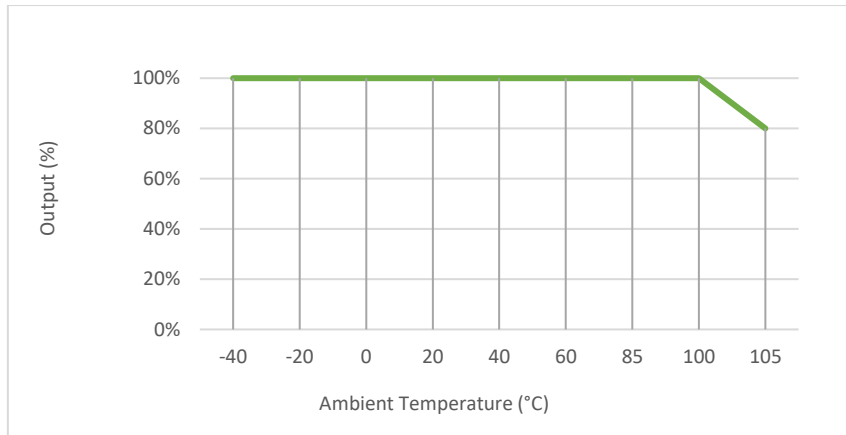

Output Voltage Accuracy vs Load

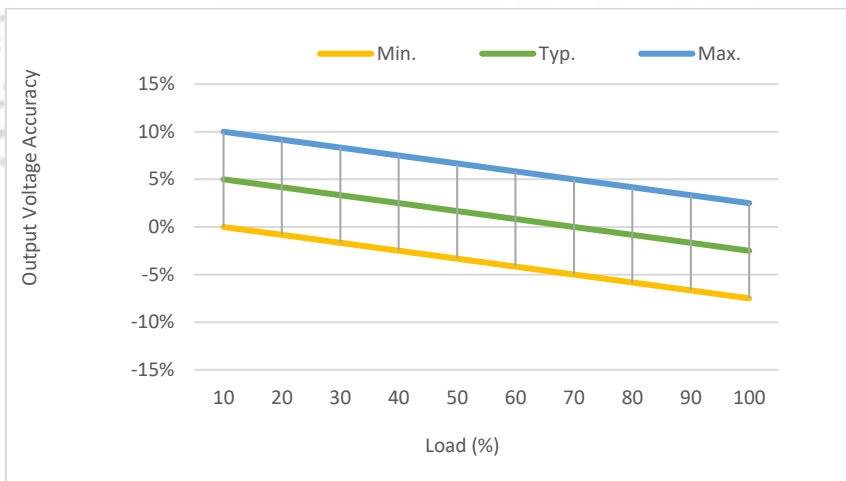


1W, DC/DC Power Converter

SDM01S




Efficiency Curves

Efficiency vs Input Voltage

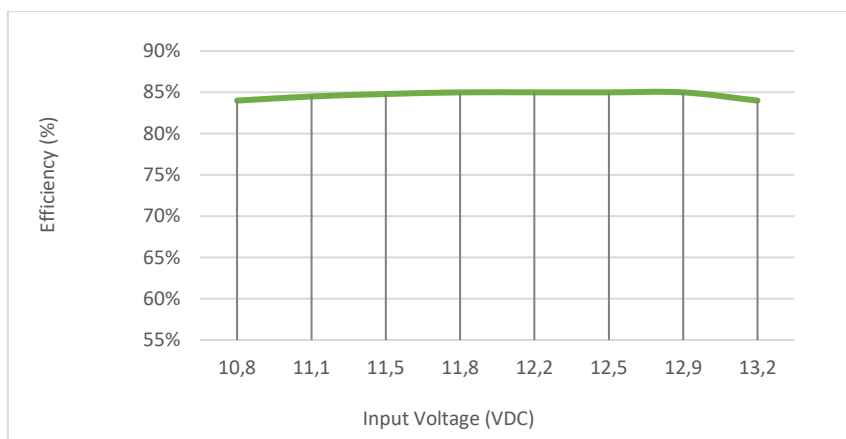

SDM01S1205, with full Load

Efficiency vs Load

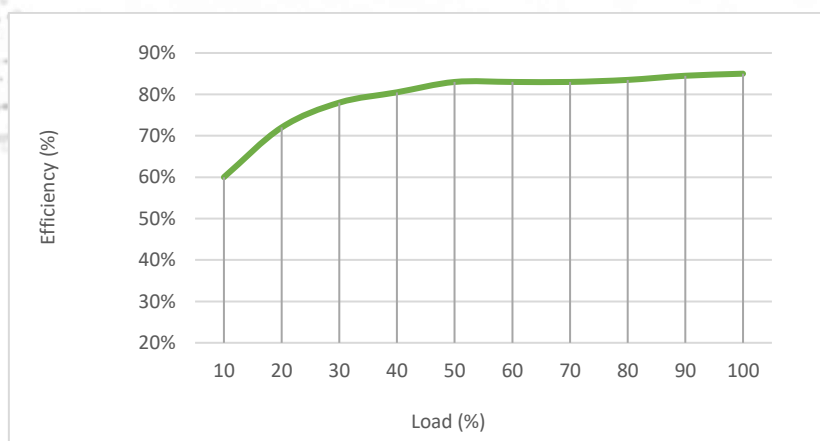


SDM01S1205, with nominal input voltage

1W, DC/DC Power Converter

SDM01S




Efficiency vs Input Voltage

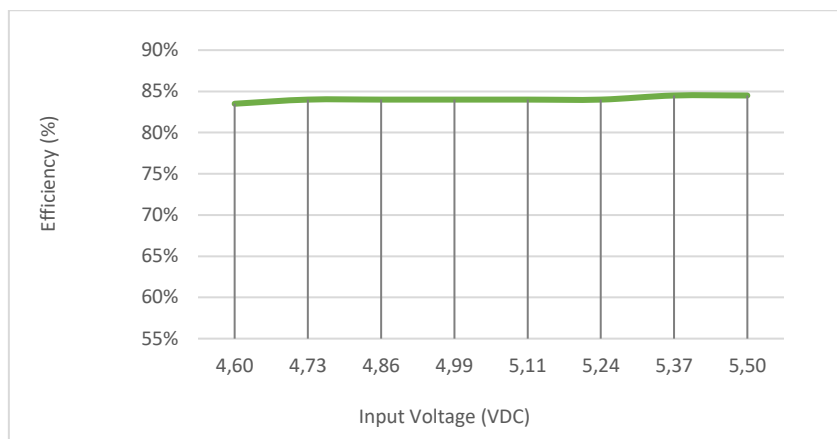

SDM01S0505D, with full Load

Efficiency vs Load

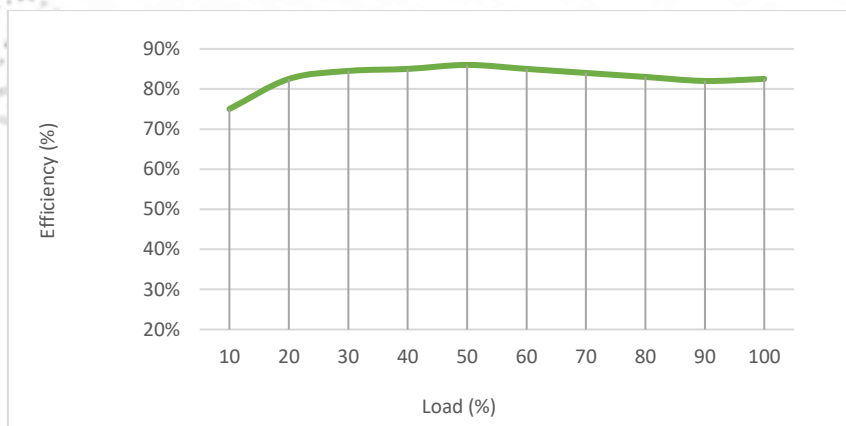

SDM01S0505D, with nominal input voltage

1W, DC/DC Power Converter

SDM01S

Recommended External Circuit

Typical Application Circuit

*Typical application circuit is to further lower the input and output ripple. It is not required for general use.

*Recommended component specifications are typical values. Excessive external capacitive load may cause startup problem.

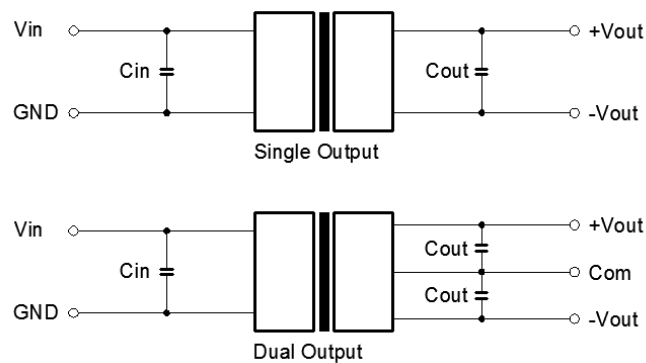


Figure 1: Typical External circuit

Recommended component spec

Input voltage	3.3, 5V	12V	15V	24V
C_{IN}	4.7uF, 16V	2.2uF, 25V	2.2uF, 25V	1uF, 50V

Recommended component spec

Output voltage	3.3, 5V	9V	12V	15V	24V
C_{OUT}	10uF, 16V	4.7uF, 16V	2.2uF, 25V	1uF, 25V	0.47uF, 50V

Circuit for EMC Enhancement

*Use this application circuit to meet Class B EMC performance.

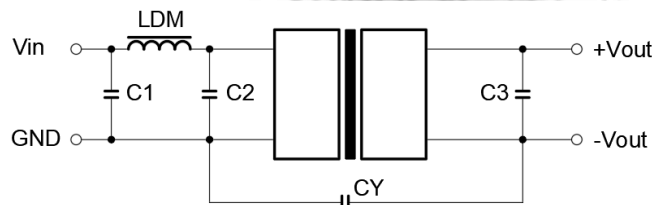


Figure 2: Circuit for EMC Enhancement

1W, DC/DC Power Converter

SDM01S



Recommended component spec

Component	LDM	C1, C2	CY
Spec	6.8uH	4.7uF, 50V	1nF, 2KV




*C3 refer to C_{OUT} in

1W, DC/DC Power Converter

SDM01S



Mechanical Specifications

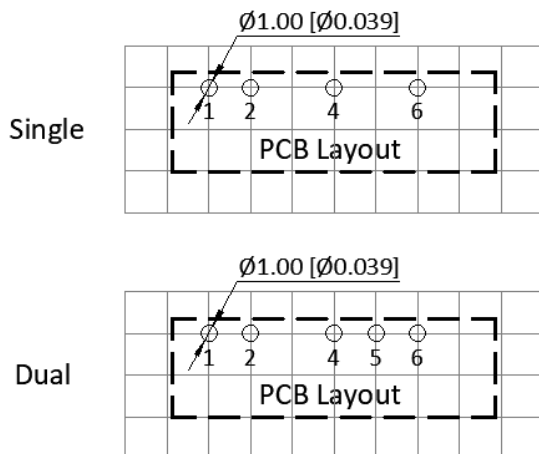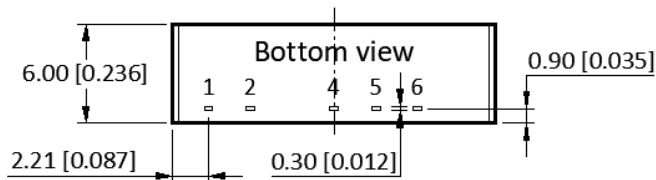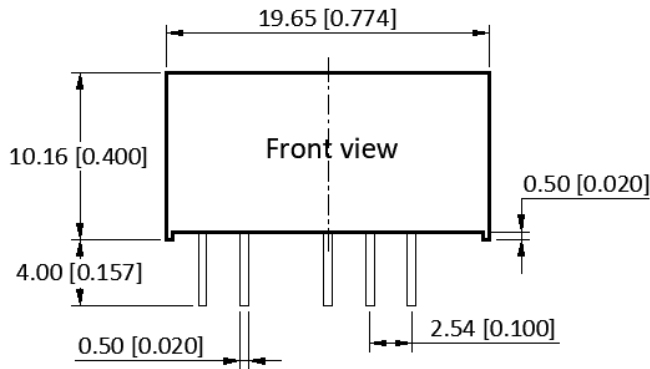

Pin Definition

Pin #	Single Out	Dual Out
1	V _{IN}	V _{IN}
2	GND	GND
4	0V	-V _{OUT}
5	No Pin	0V
6	+V _{OUT}	+V _{OUT}

* Unless otherwise specified unit:

mm [inch]

* General tolerance: ± 0.50 [± 0.020]

* Pin thickness: ± 0.10 [± 0.004]

* Footprint grid 2.54 x 2.54 mm

1W, DC/DC Power Converter

SDM01S



Ordering information

Ordering can be done via www.summit-electronics.com or via info@summit-electronics.com. Please contact us for more information. Customisation of the product is available on request.

Technical support

For all product questions please contact us via info@summit-electronics.com

Document revision

Rev	Date	Changes
2025v0.1	27-08-2025	First issue of document