

1A, DC/DC Power Converter

SDX10SN

SUMMIT
ELECTRONICS



Introduction

The SDX10SN series are non-isolated switching regulators, pin to pin compatible with LM78 family linear regulators. Unlike those linear regulators, the RM series switching regulators are high efficiency up to 96%. They do not need for any heatsink because very few energy is wasted as heat. Besides, these converters accept very wide input voltage range 6~36VDC, operate over wide ambient temperature range -40 ~ +85°C, and are short circuit and overheat protected. This particular series has very low no load input current, 0.3mA only. These converters are especially suitable for applications such portable devices, where energy saving, space saving and high performance are essential.

Features

- Rated output current: 1A
- Non-isolated, step down switching regulators
- Input voltage range: 6.0~36VDC
- Regulated single output with low ripple and noise
- High efficiency up to 96%, no need for heatsink
- Low no load input current, 0.3mA only
- Compatible with LM78 linear regulators
- RoHS compliant
- Short circuit protection
- Operating temperature range: -40 ~ +85°C ambient
- Meet IEC/EN/UL 62368-1
- 3 year warranty

1A, DC/DC Power Converter

SDX10SN



Part numbers

Model Number	Input Voltage Range [VDC]			V _{OUT} [VDC]	I _{OUT} [mA] Max.	Efficiency [%] Typ.		Capacitive Load [uF] Max.
	Nom.	Min.	Max.			Min. V _{IN}	Max. V _{IN}	
SDX10SN033	24	6	36	3.3	1000	90	80	680
SDX10SN050	24	8	36	5	1000	93	85	680
	12	8	27	-5	-500	85	81	330
SDX10SN065	24	10	36	6.5	1000	93	85	680
SDX10SN090	24	13	36	9	1000	94	89	680
SDX10SN120	24	16	36	12	1000	95	92	680
	12	8	20	-12	-300	88	87	330
SDX10SN150	24	20	36	15	1000	96	93	680
	12	8	18	-15	-300	87	88	330

* Only typical models are listed. Contact our sales agent for availability of other models.

1A, DC/DC Power Converter

SDX10SN



Electrical characteristics

Unless otherwise indicated, specifications are measured at $T_A=25^{\circ}\text{C}$, nominal input voltage, full load after warm up.

Parameter	Condition	Min.	Type	Max.	Unit	Notes
No load input current V_{IN} = Min. to Max.	Positive Out Negative Out	-	0.3 1.0	1.0 4.0	mA	
Output voltage accuracy Full load	RM10SN-033 Others	-	± 2 ± 1.5	± 4 ± 3		
Line regulation	V_{IN} = Min. to Max.	-	± 0.2	± 0.4	%	
Load regulation I_{OUT} = 10%~100%	Positive Out Negative Out	-	± 0.4 ± 0.4	± 0.6 ± 0.8	%	
Temperature coefficient	- 40°C~+85°C	-	-	0.03	%/°C	
Output ripple and noise 20MHz bandwidth, peak to peak		-	25	75	mV	
Dynamic load response I_{OUT} =25%~50%~75% of $I_{OUT, rated}$	Peak deviation Recovery time	-	60 0.2	200 1	mV mS	
Output short circuit protection		Continuous, automatic recovery				
Input filter		Capacitor				

1A, DC/DC Power Converter

SDX10SN



General Specifications

Parameters	Condition	Min.	Typ.	Max.	Unit
Operating temperature		-40	-	+85	°C
Storage temperature		-55	-	+125	°C
Storage humidity	Non-condensing	5	-	95	%RH
Switching frequency	Full load	-	600	-	KHz
Pin soldering resistance 1.5mm away from case for 10 sec		-	-	260	°C
Cooling method		Free air convection			
Case material		Black plastic UL94-V0			
Design based on standards		UL/EN/IEC 62368-1			
Safety certifications		EN 62368-1			
EMC	Emissions Immunity	CISPR32, EN55032 Class B* (external circuit required) IEC/EN61000-4-2, 3, 4, 6			
MTBF	MIL-HDBK-217F	>2,000,000 Hours, T _A =25°C			
Size & Weight		11.60 x 7.55 x 10.16 mm, 1.8g Typ.			

1A, DC/DC Power Converter


SDX10SN



Characteristics Curves


Derating Curve

Output vs Ambient Temperature

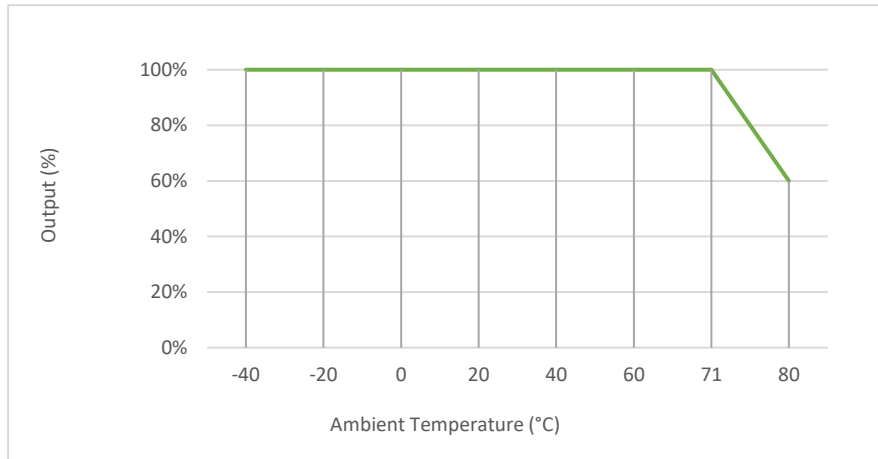

Efficiency vs Input Voltage

Full Load, SDX10SN050

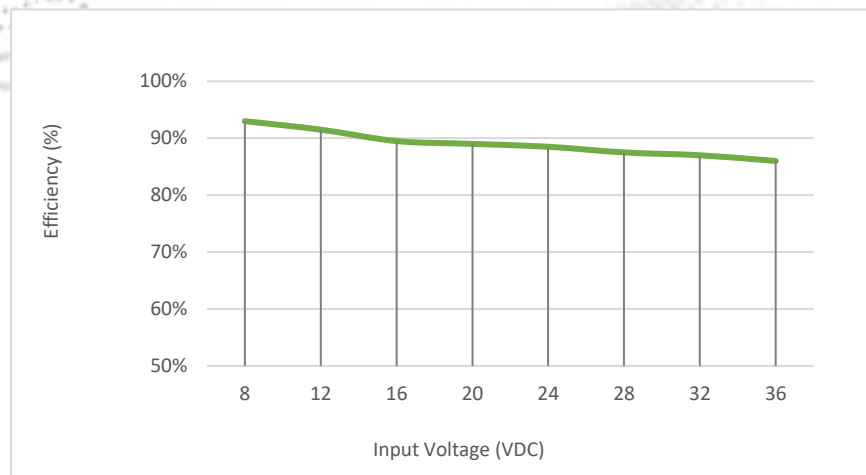


1A, DC/DC Power Converter

SDX10SN



Efficiency vs Load

Nominal input voltage, SDX10SN050

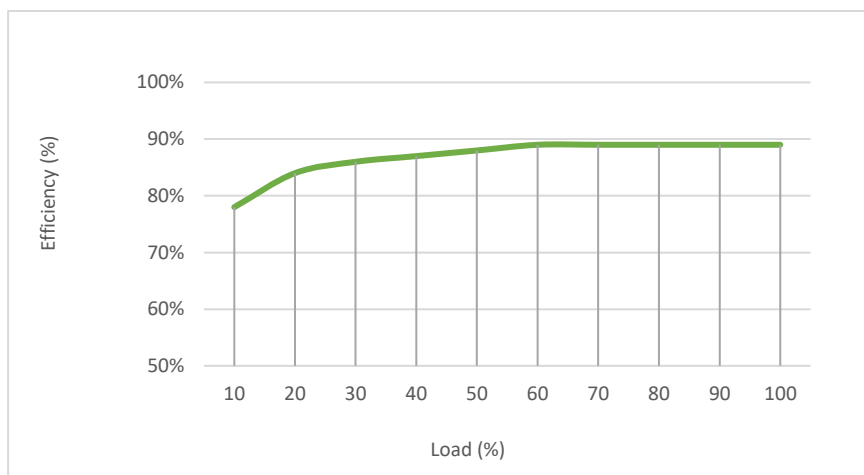

1A, DC/DC Power Converter

SDX10SN



Recommended External Circuit

Typical Application Circuit

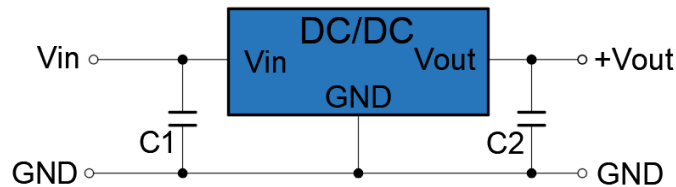


Figure 1: positive output application

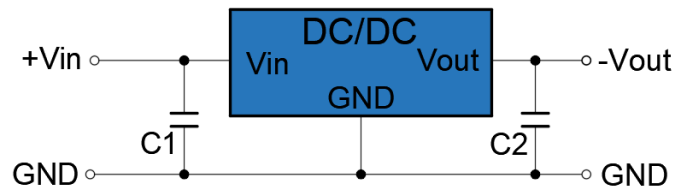


Figure 2: negative output application

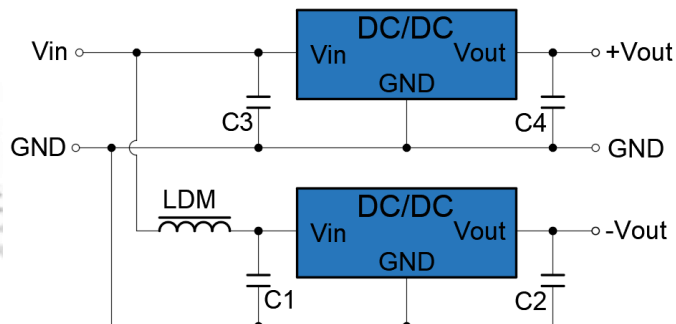


Figure 3: dual output application

Notes:

1. $C1$, $C2$, $C3$, $C4$ are ceramic capacitors, and mandatory for operating of the converters. They can also be tantalum or low ESR electrolytic capacitors. Recommended specs listed in the table on right can be changed according to the needs in the circuits. Recommended LDM is $10\mu H$.
2. The converter can be used both for positive and negative output using the circuit connection shown above.
3. These converters are not allowed to use in parallel or hot plug without support from properly designed external circuits.

1A, DC/DC Power Converter

SDX10SN

Recommend component specifications

Model Number	C1, C3	C2, C4
SDX10SN033	10uF, 50V	22uF, 10V
SDX10SN050	10uF, 50V	22uF, 10V
SDX10SN065	10uF, 50V	22uF, 16V
SDX10SN090	10uF, 50V	22uF, 16V
SDX10SN120	10uF, 50V	22uF, 25V
SDX10SN150	10uF, 50V	22uF, 25V

Circuit for EMC Enhancement

* This application circuit is recommended in order to meet EN55032 Class B

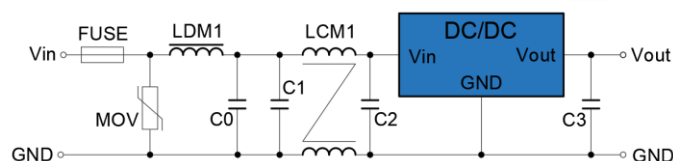


Figure 4: circuit diagram for positive output

1A, DC/DC Power Converter

SDX10SN



Recommended External Circuit (continued)

Recommended component spec




Positive output	
Item	Recommended spec
MOV	20D470K
LDM1	82uH
C0	680uF, 50V
LCM1	4.7mH
C1, C2	4.7uF, 50V
C3	Refer to the C2 in "Table 1"

1A, DC/DC Power Converter

SDX10SN



Mechanical Specifications

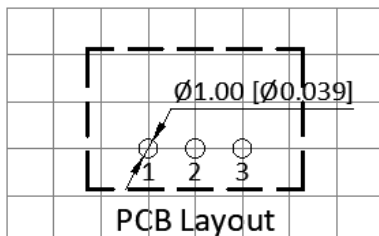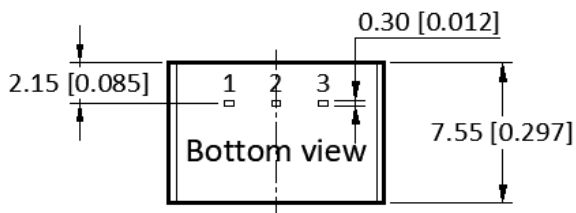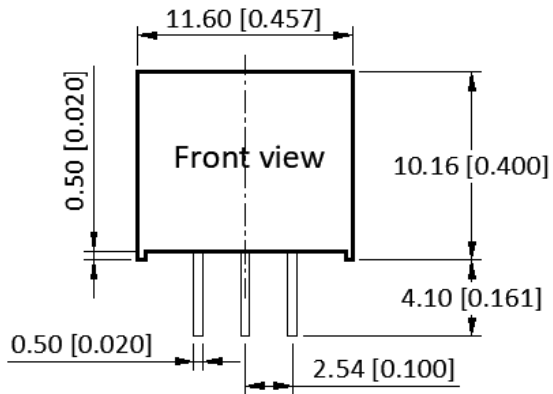

Pin Definition

Pin #	Positive Out	Negative Out
1	+V _{IN}	+V _{IN}
2	GND	-V _{OUT}
3	+V _{OUT}	GND

* Unless otherwise specified unit:
mm [inch]

* General tolerance: ± 0.50 [± 0.020]

* Pin thickness tolerance: ± 0.10
[± 0.004]

* Footprint grid: 2.54 x 2.54 mm

1A, DC/DC Power Converter

SDX10SN



Ordering information

Ordering can be done via www.summit-electronics.com or via info@summit-electronics.com. Please contact us for more information. Customisation of the product is available on request.

Technical support

For all product questions please contact us via info@summit-electronics.com

Document revision

Rev	Date	Changes
2025v0.1	27-08-2025	First issue of document